





Detachable Container

Fast, Flexible,
Reliable Modular Houses
& Services Provider




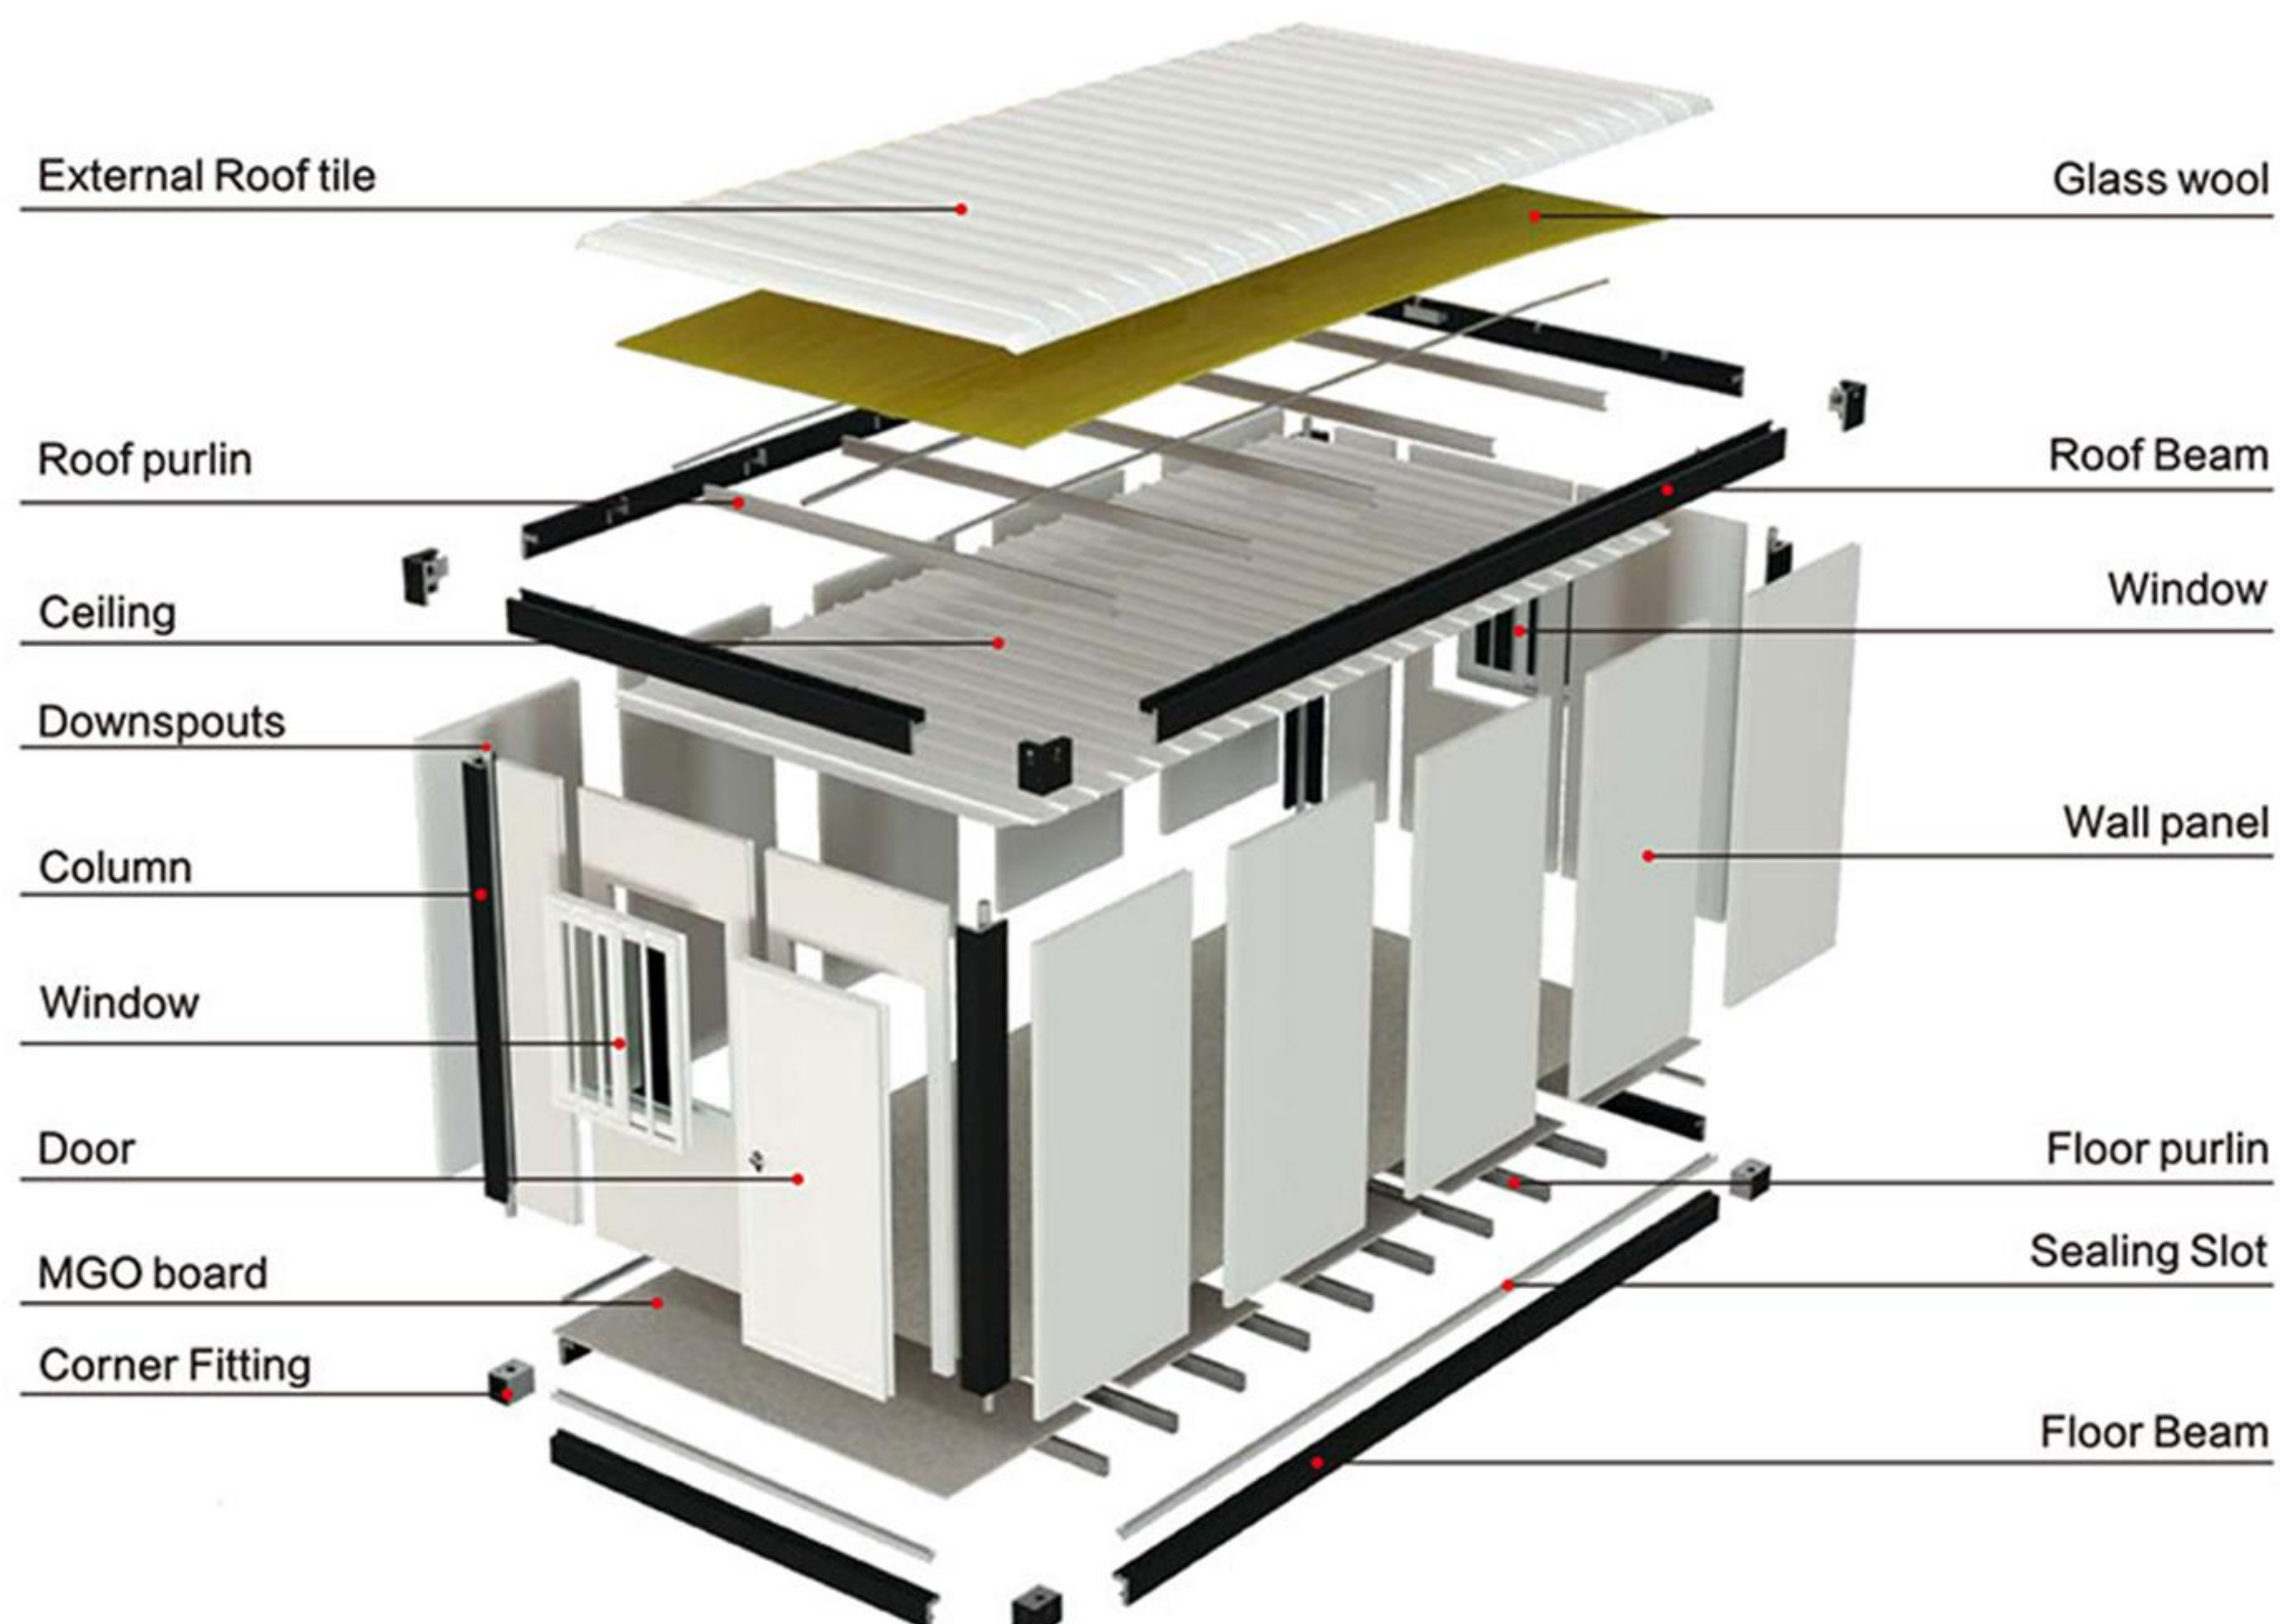

Size Customization

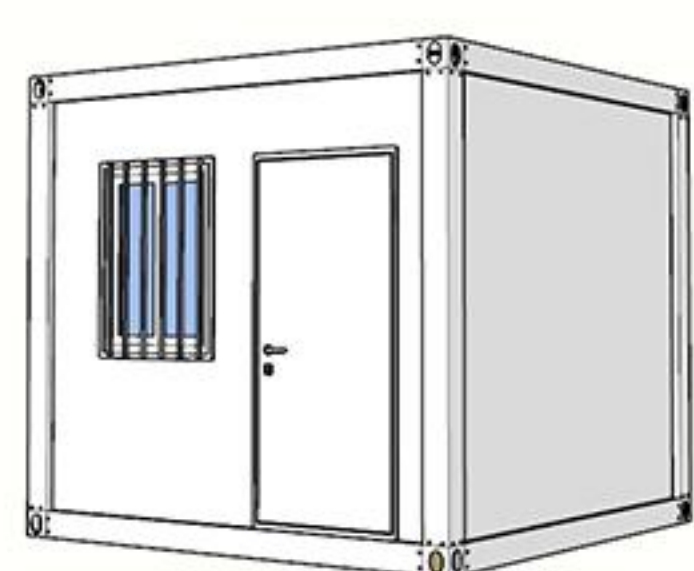


3x3

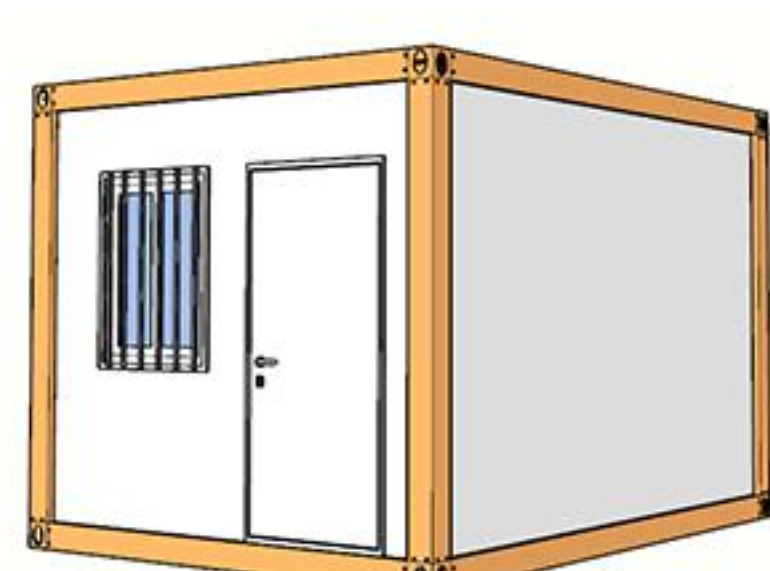

3x4



3x6

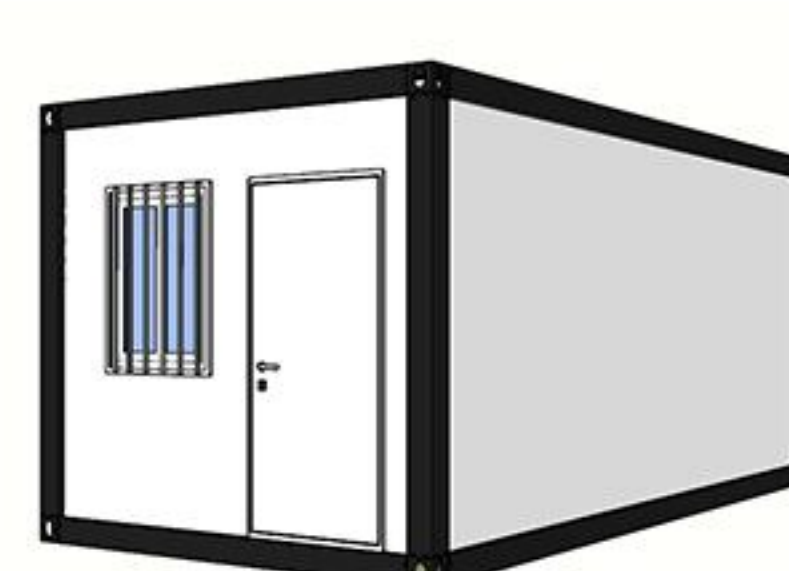

3x9



3x12

Wall



EPS



Rock Wool



Glass Wool



PU

Frame Thickness Selection



1.8



2.0



2.3



2.5



3.0

Drainage Structure



Internal Drainage




External Drainage



Land load	2.0KN/m ²
Roof load	1.0KN/m ²
Thermal resistance	H/0.04
Fire resistance	A Lever >3hours
Wind resistance	12 Level 32.7-41.4m/s
Earthquake resistance	Level 8
Insulation	50/75/100mm Rock wool bulk density 80KG
Service life	12-15 years

Electricity

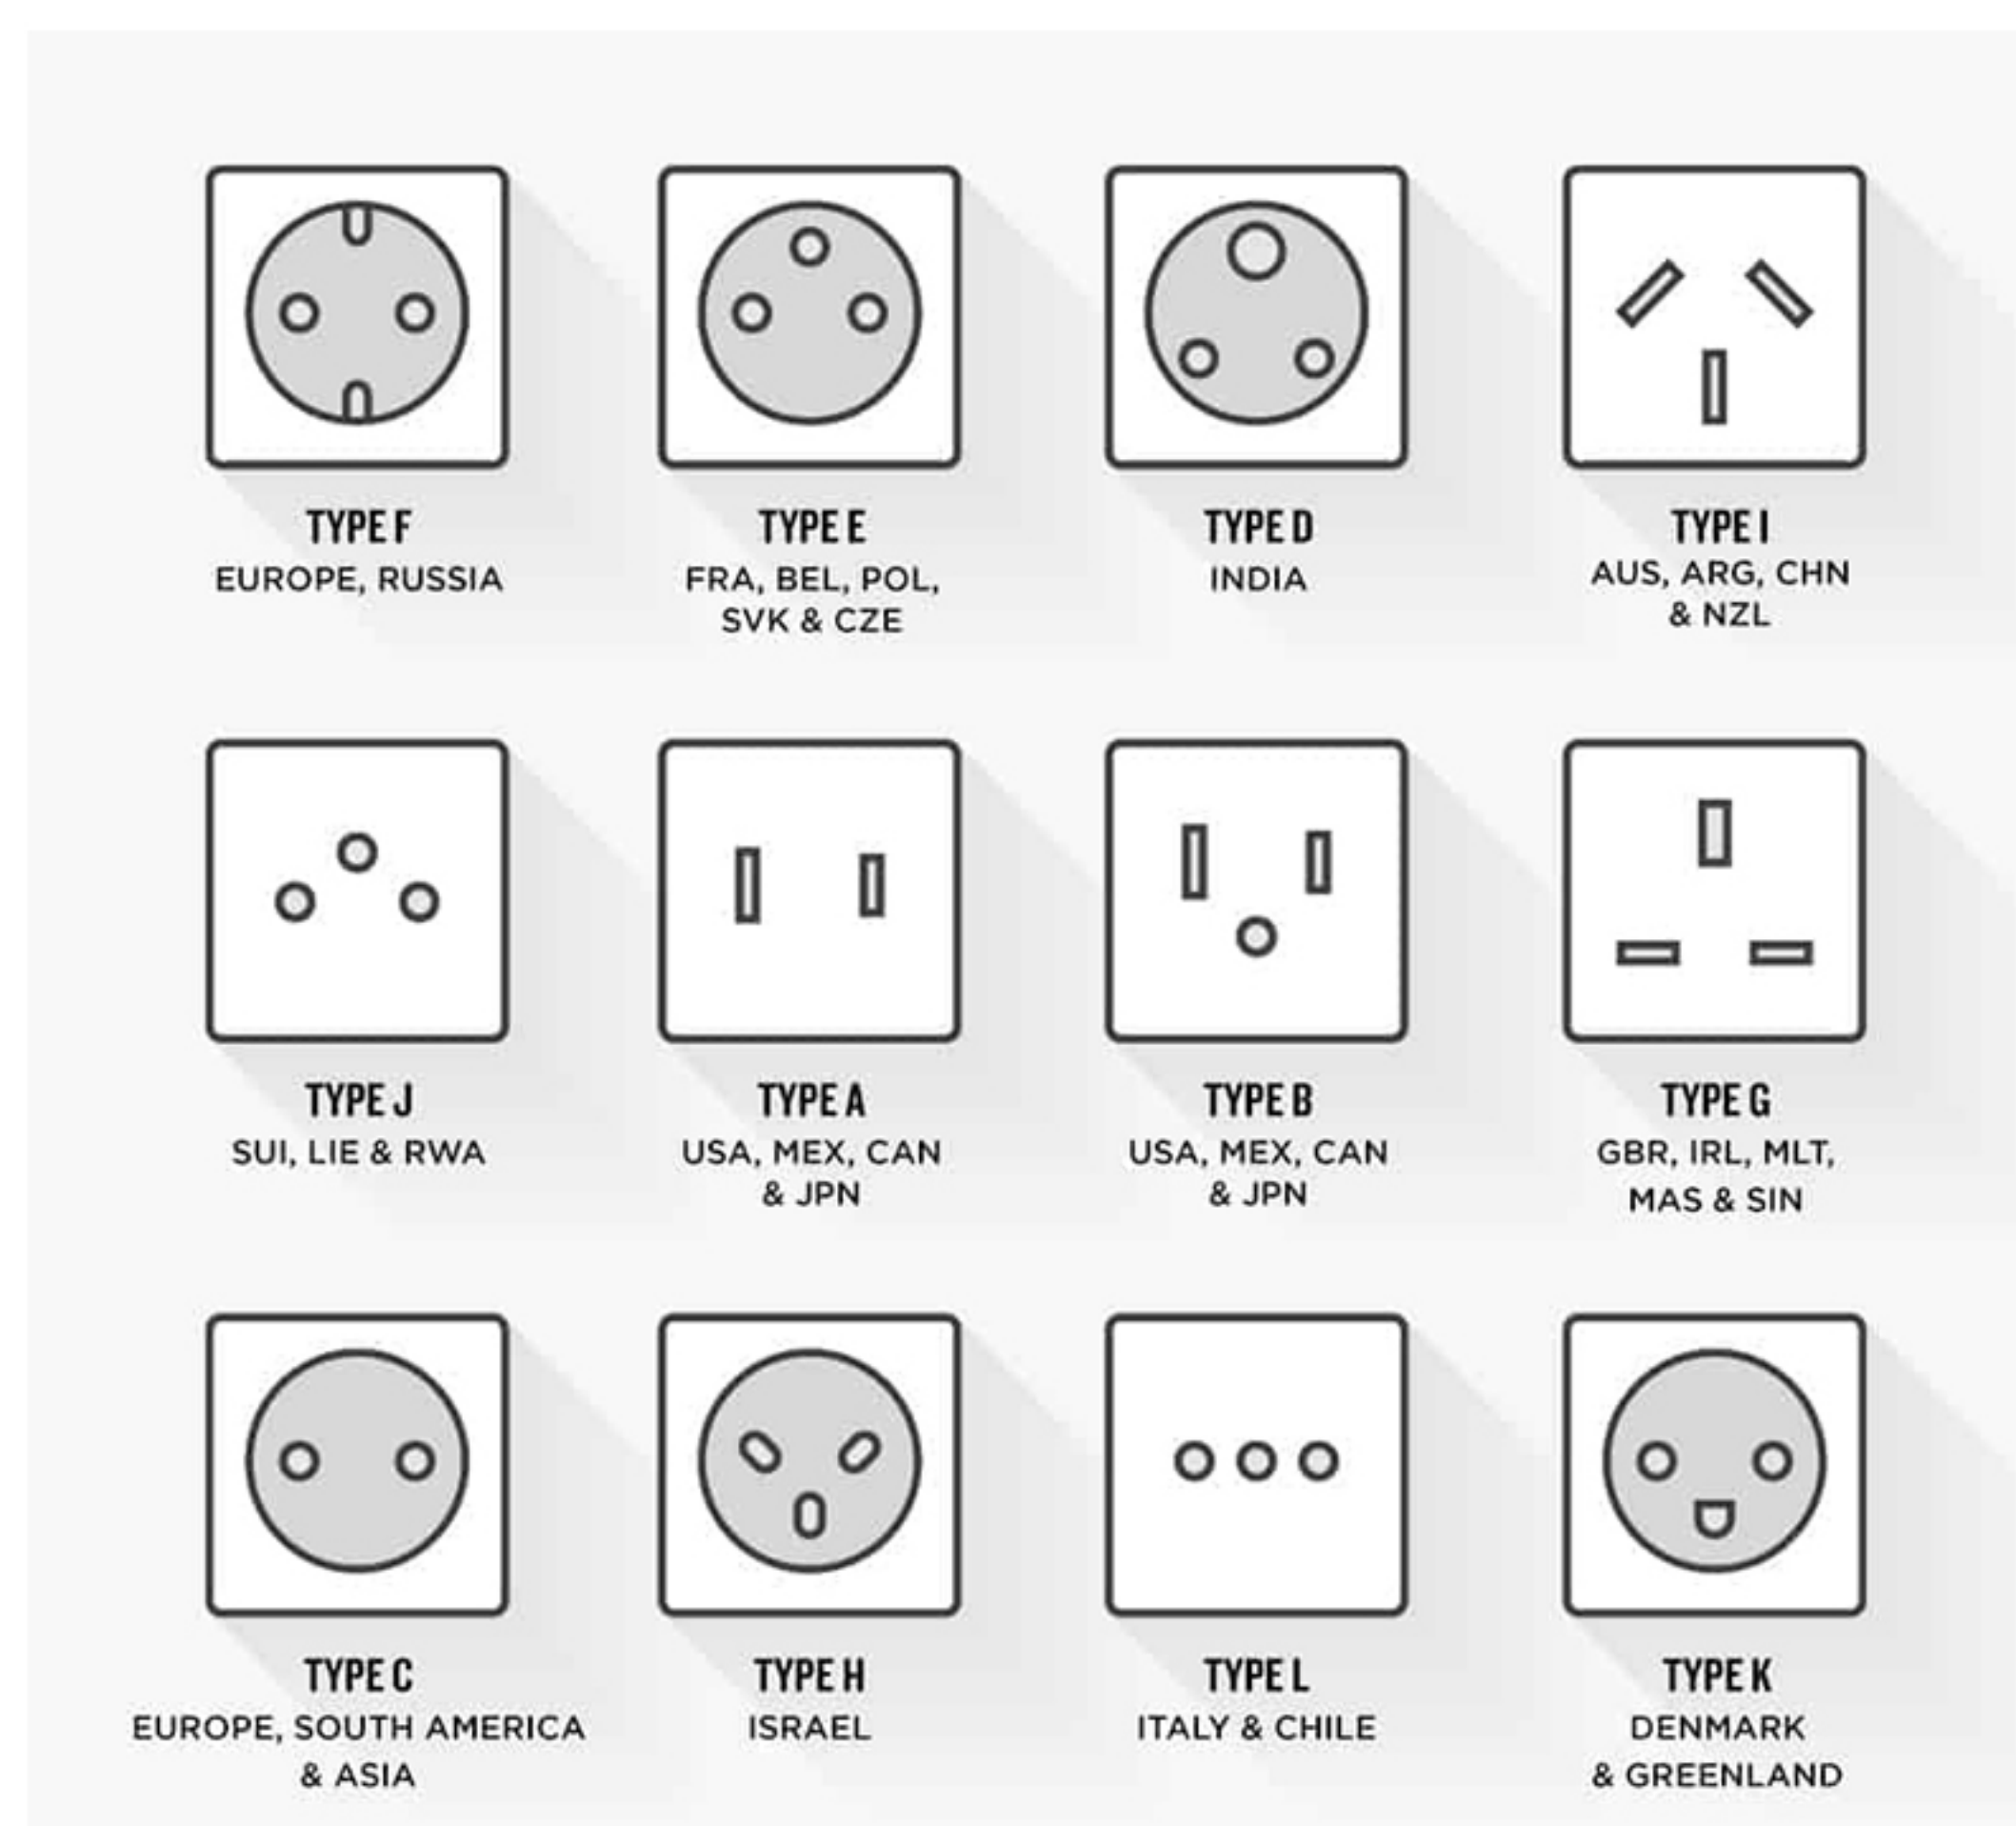

Door




UPVC Steel Door

UPVC window

Steel Door

Aluminium Alloy Window

Roof Customization

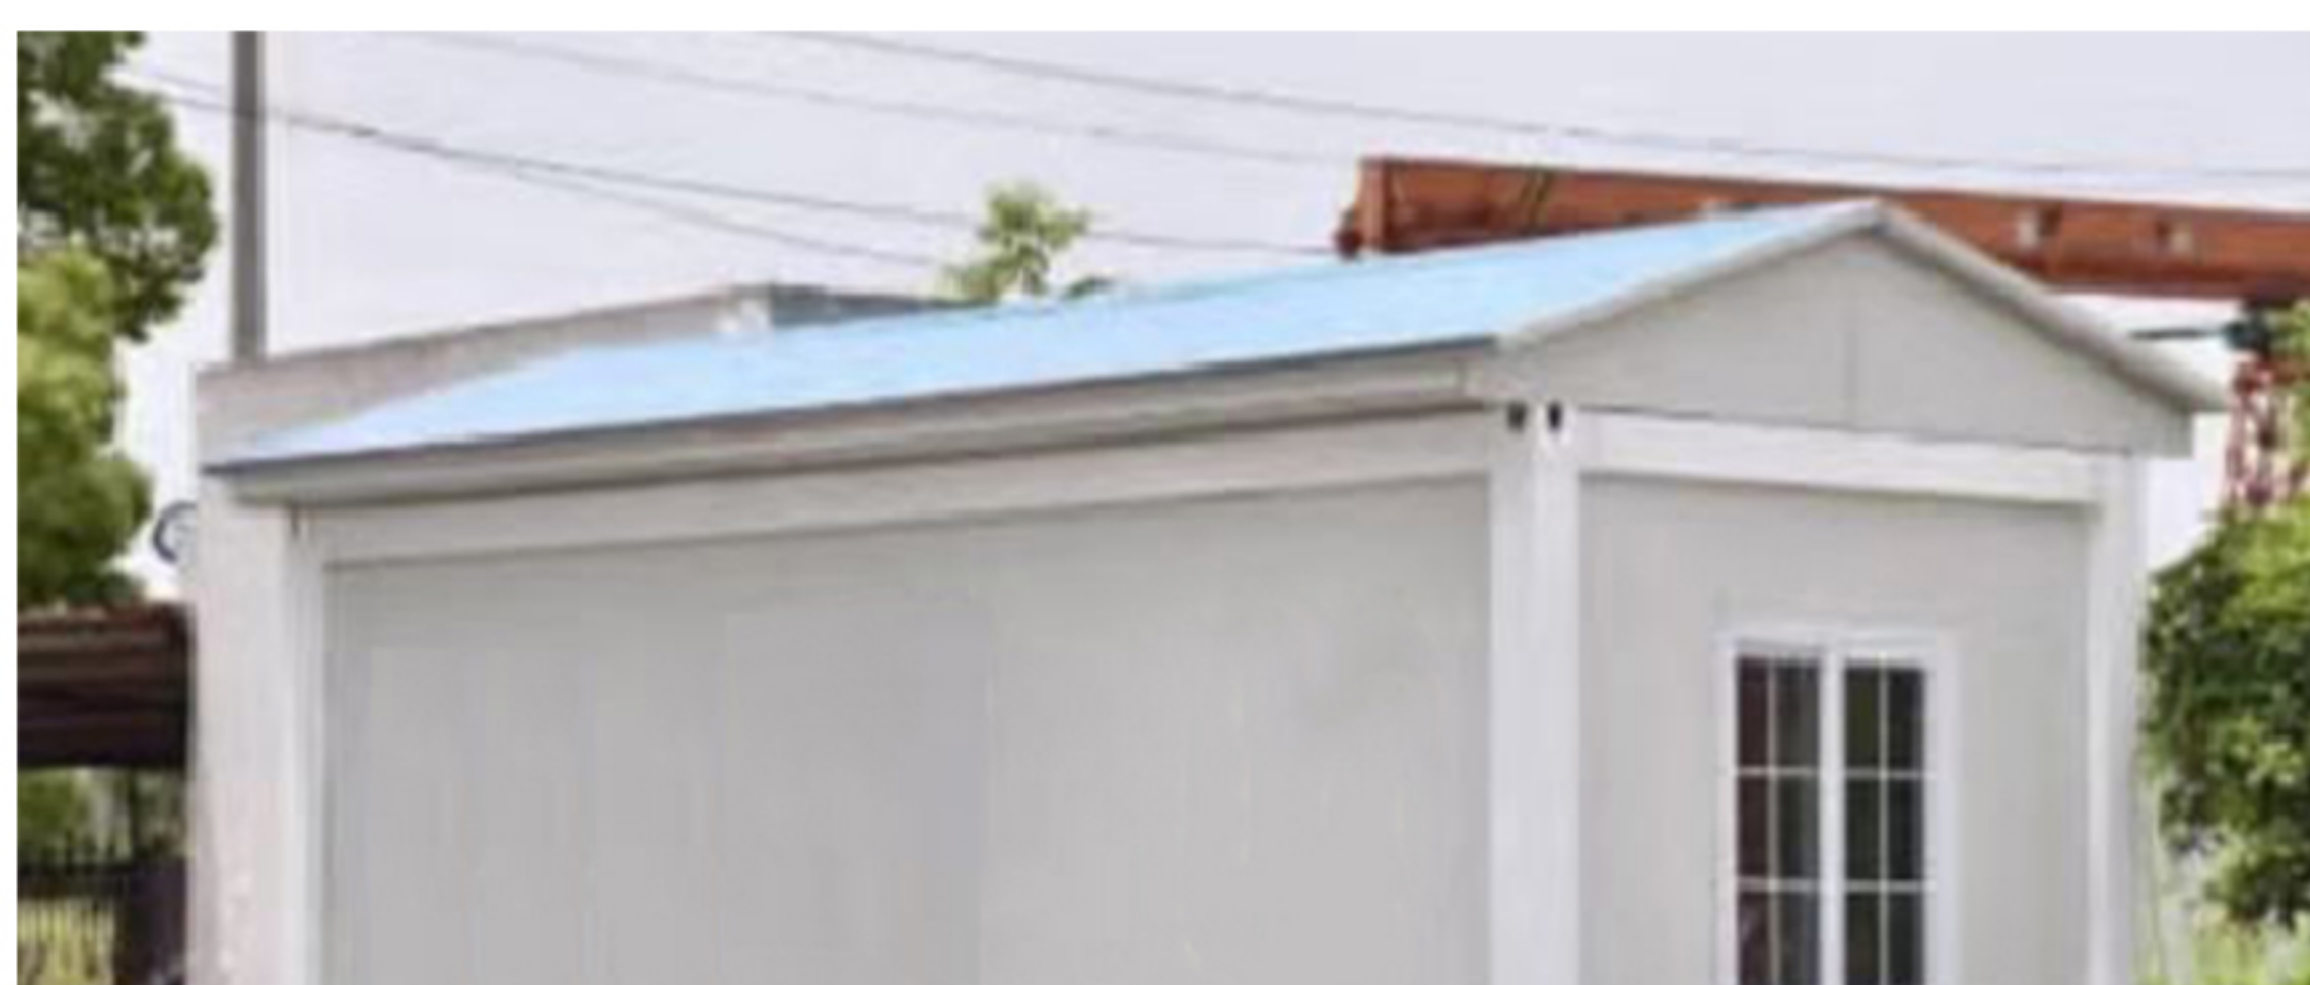

Double Slope Roof



Four-Slope Roof



Herringbone Roof




Multi Slope Roof

Stacking layers



Stairs

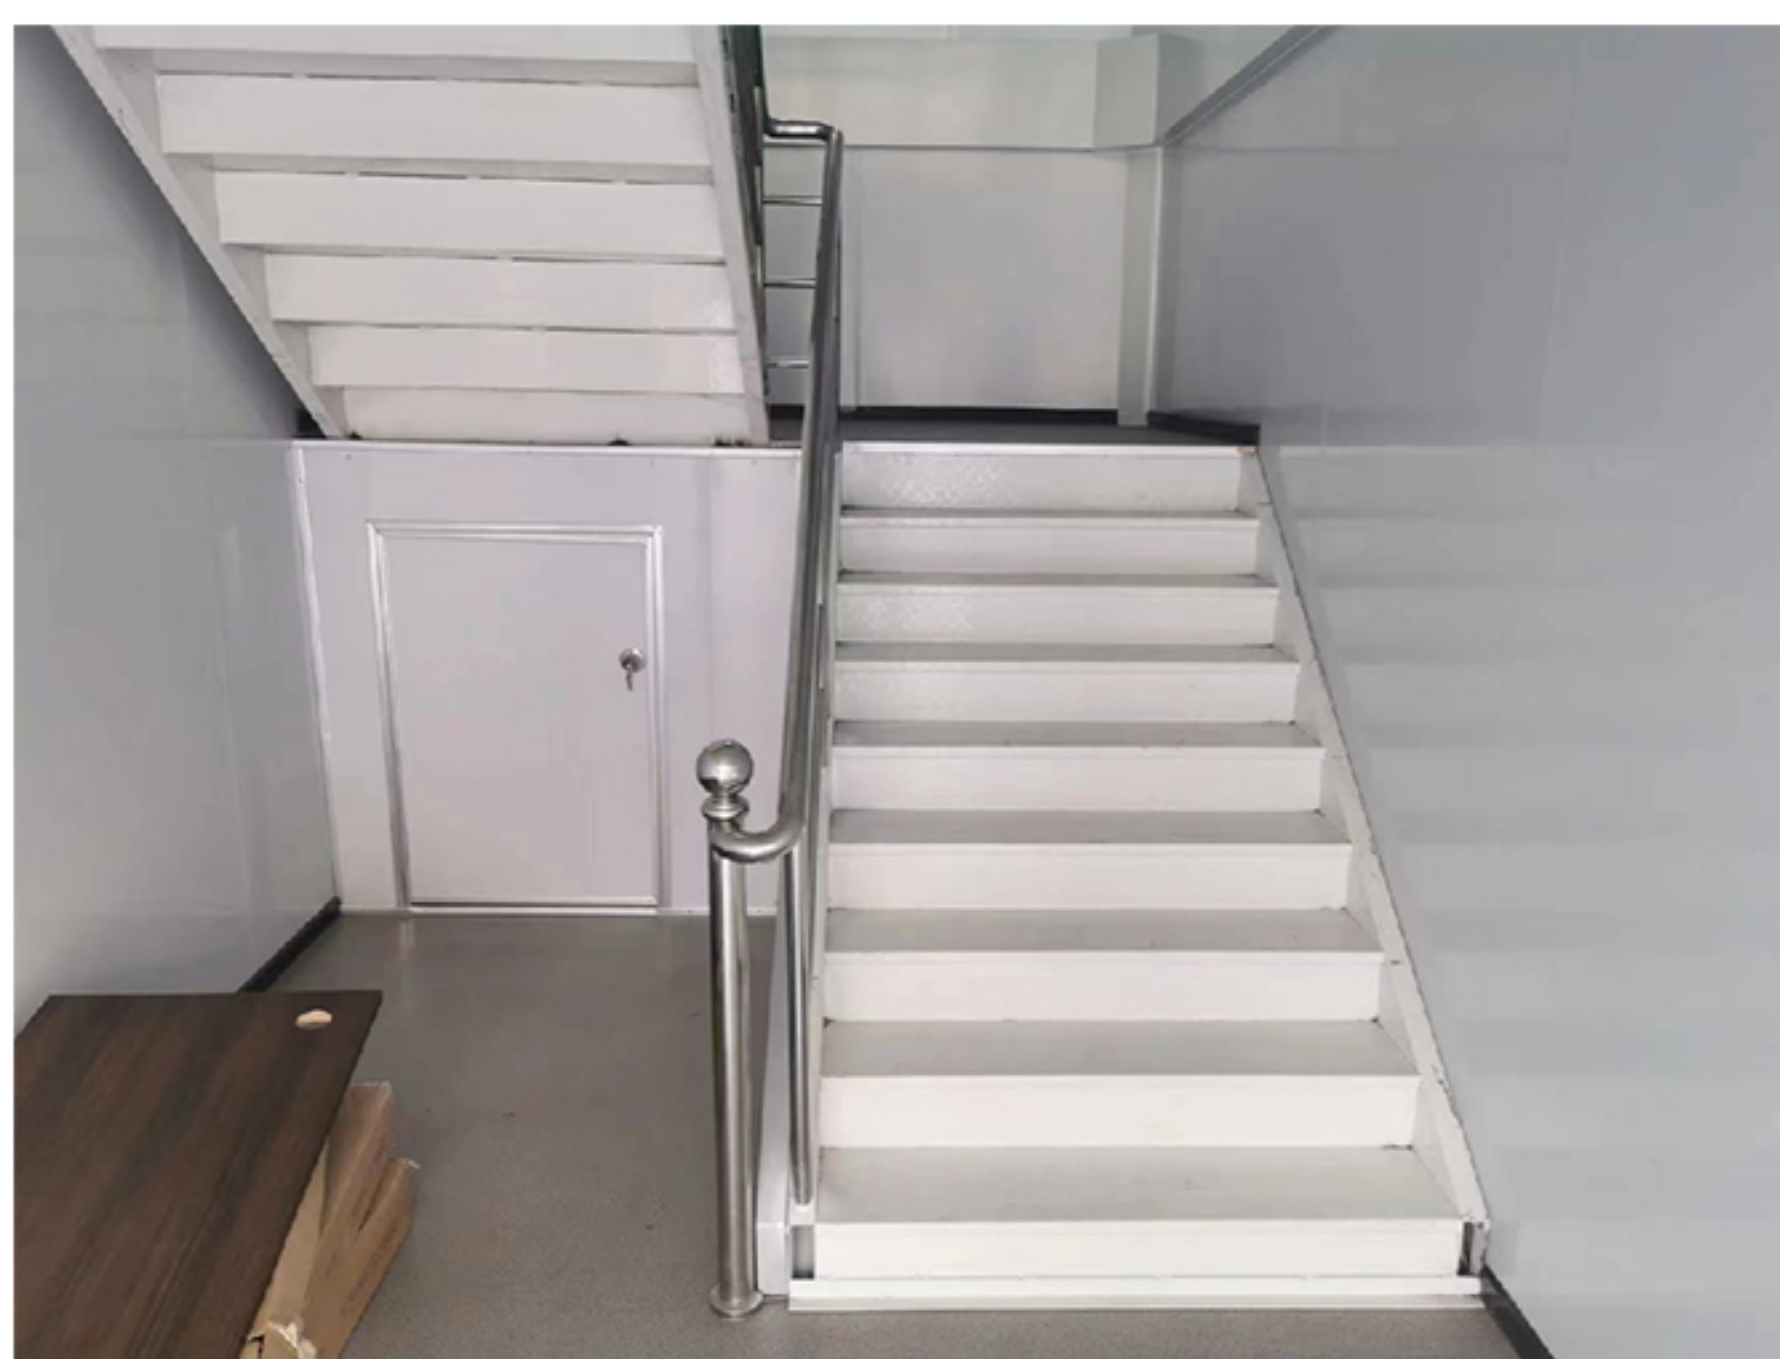












Equipped With Solar Panels



Equipped With Trailer



Layout

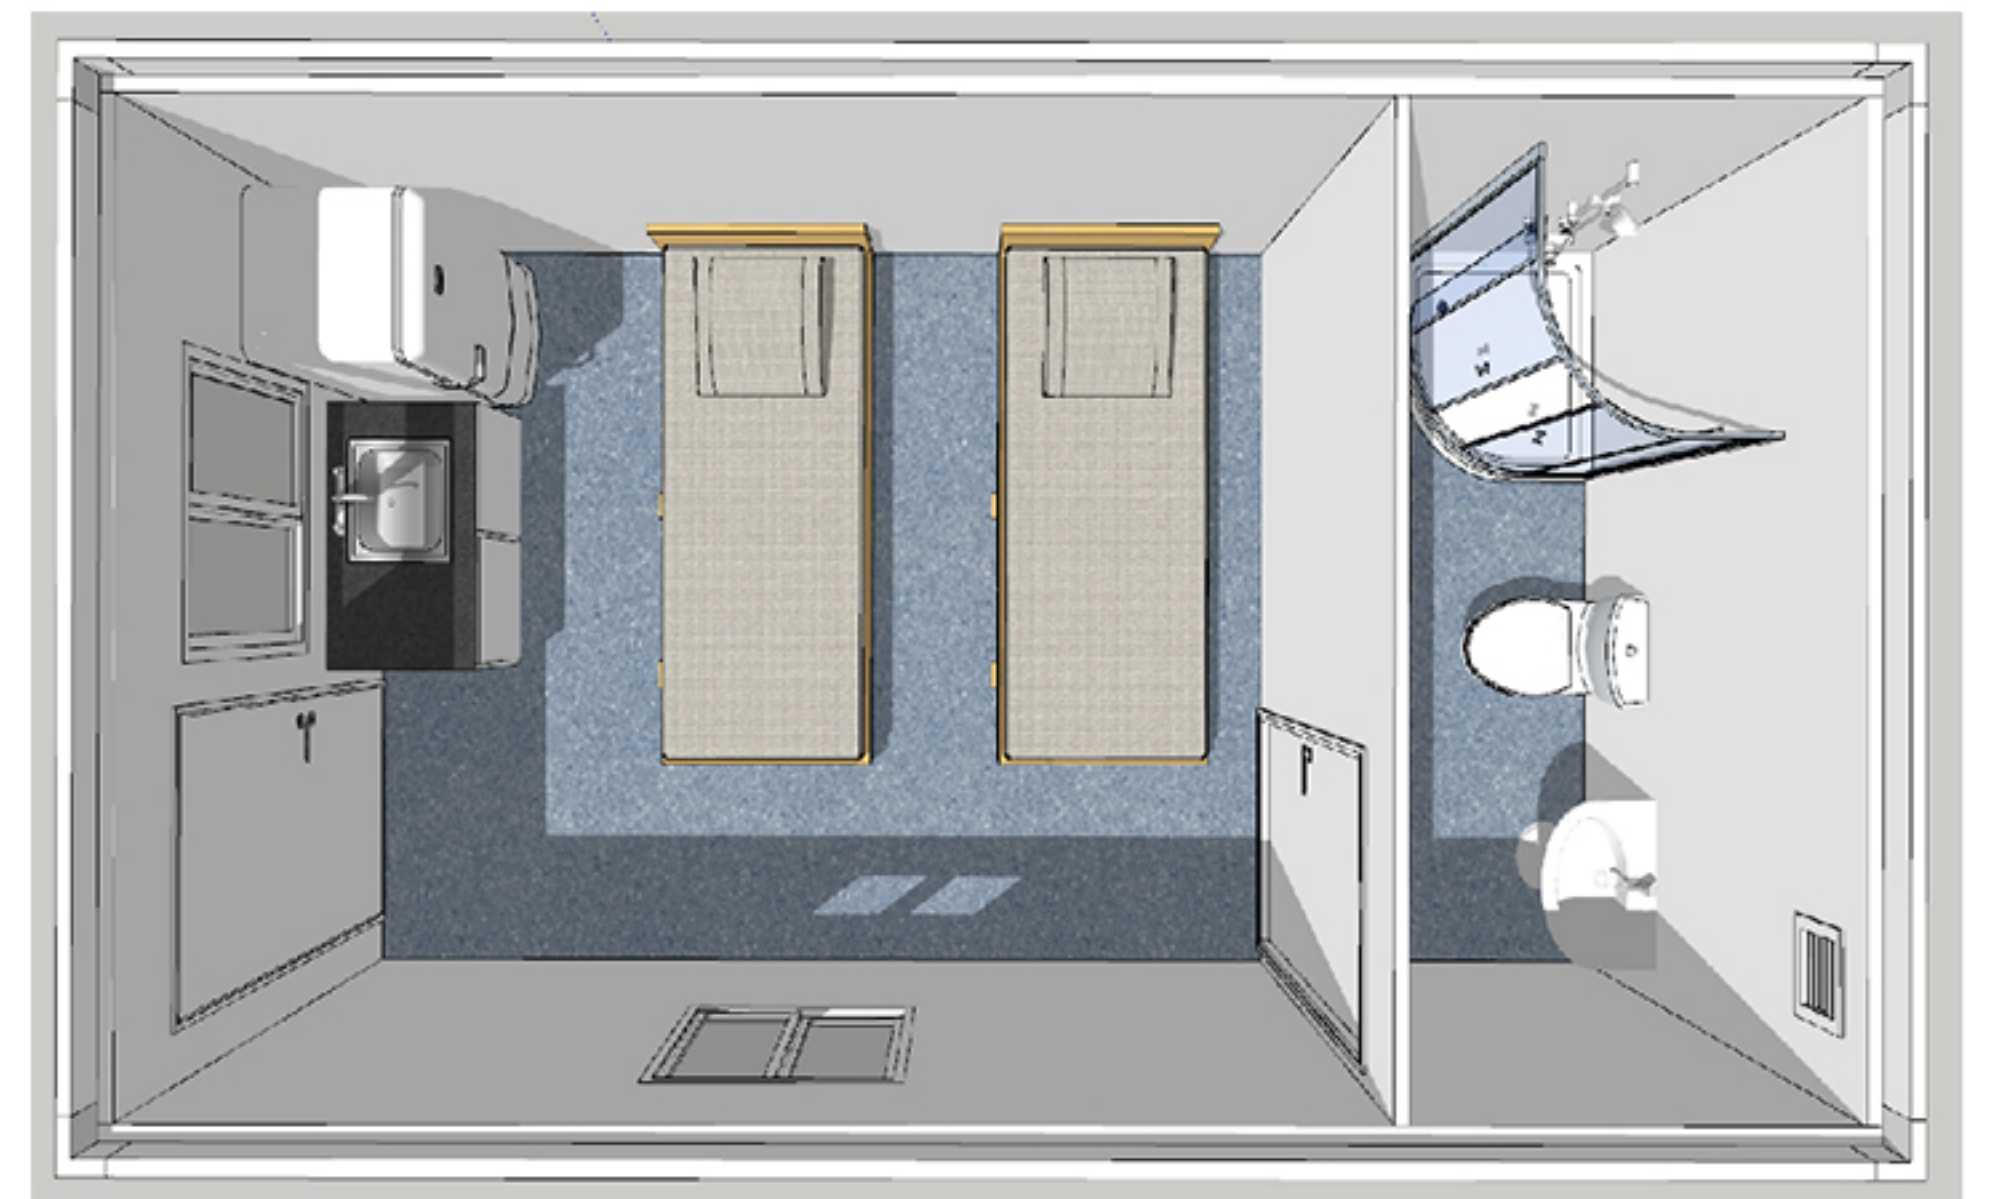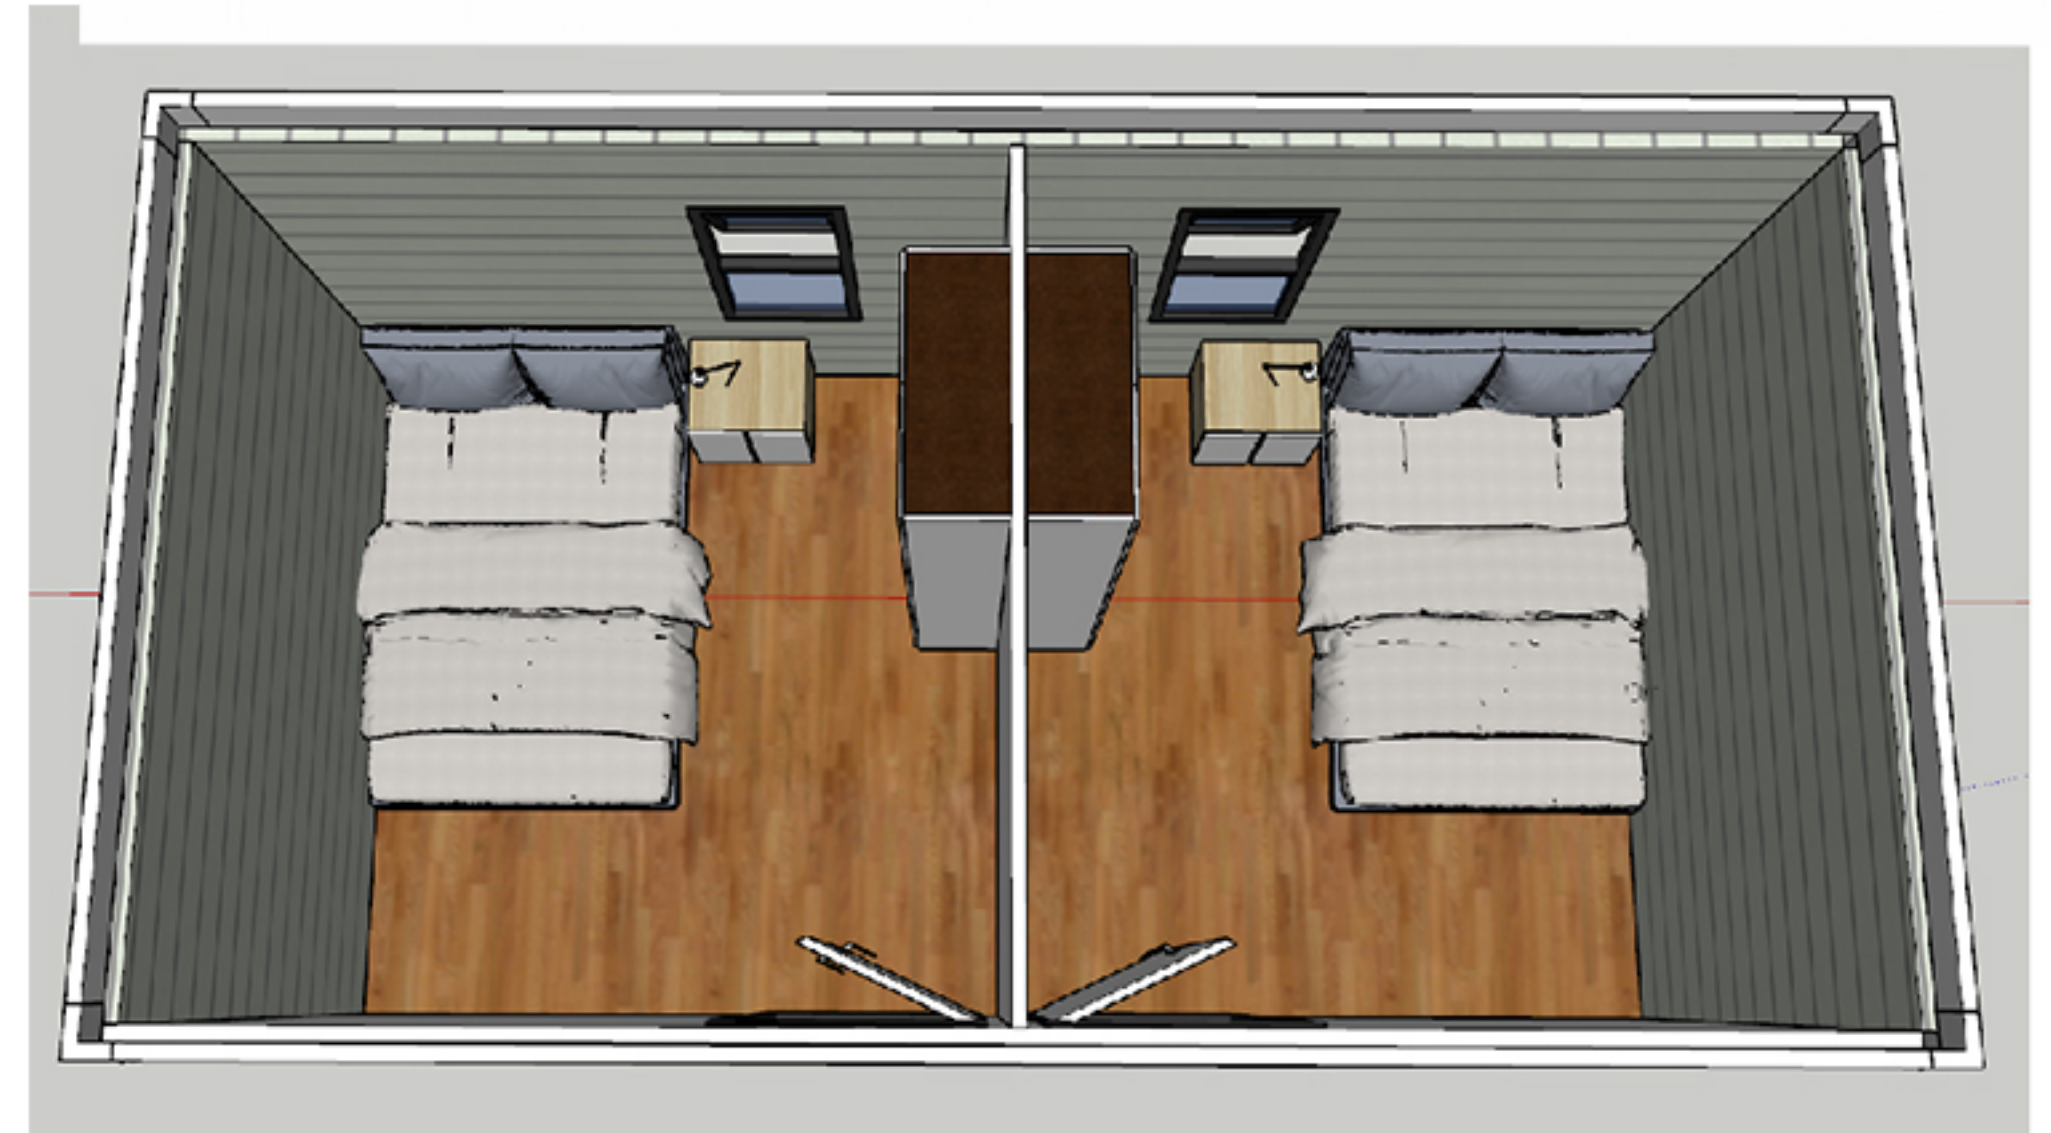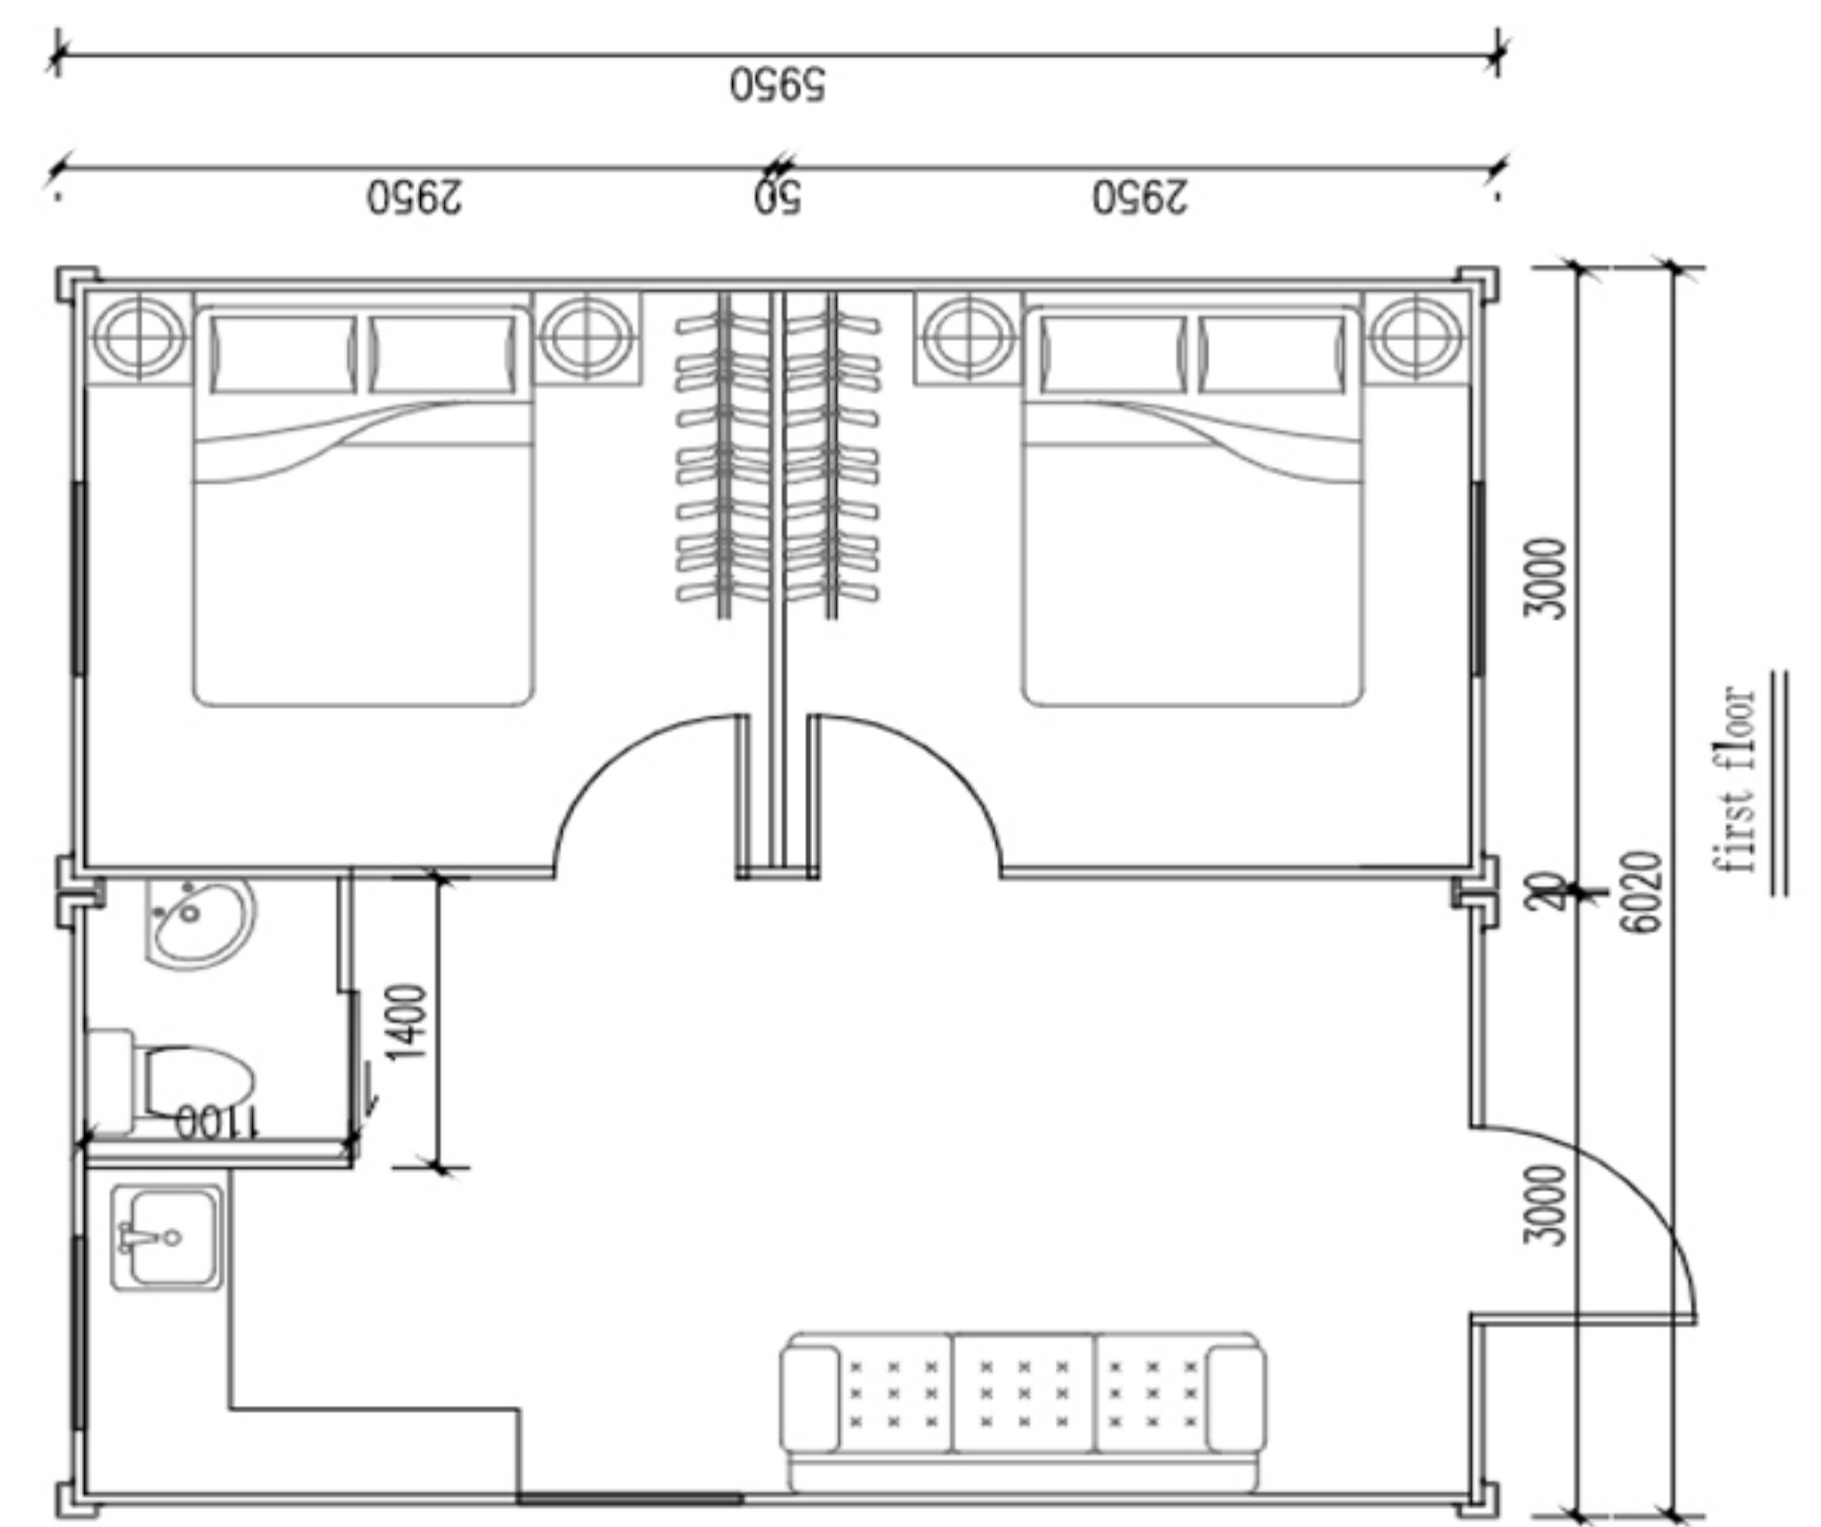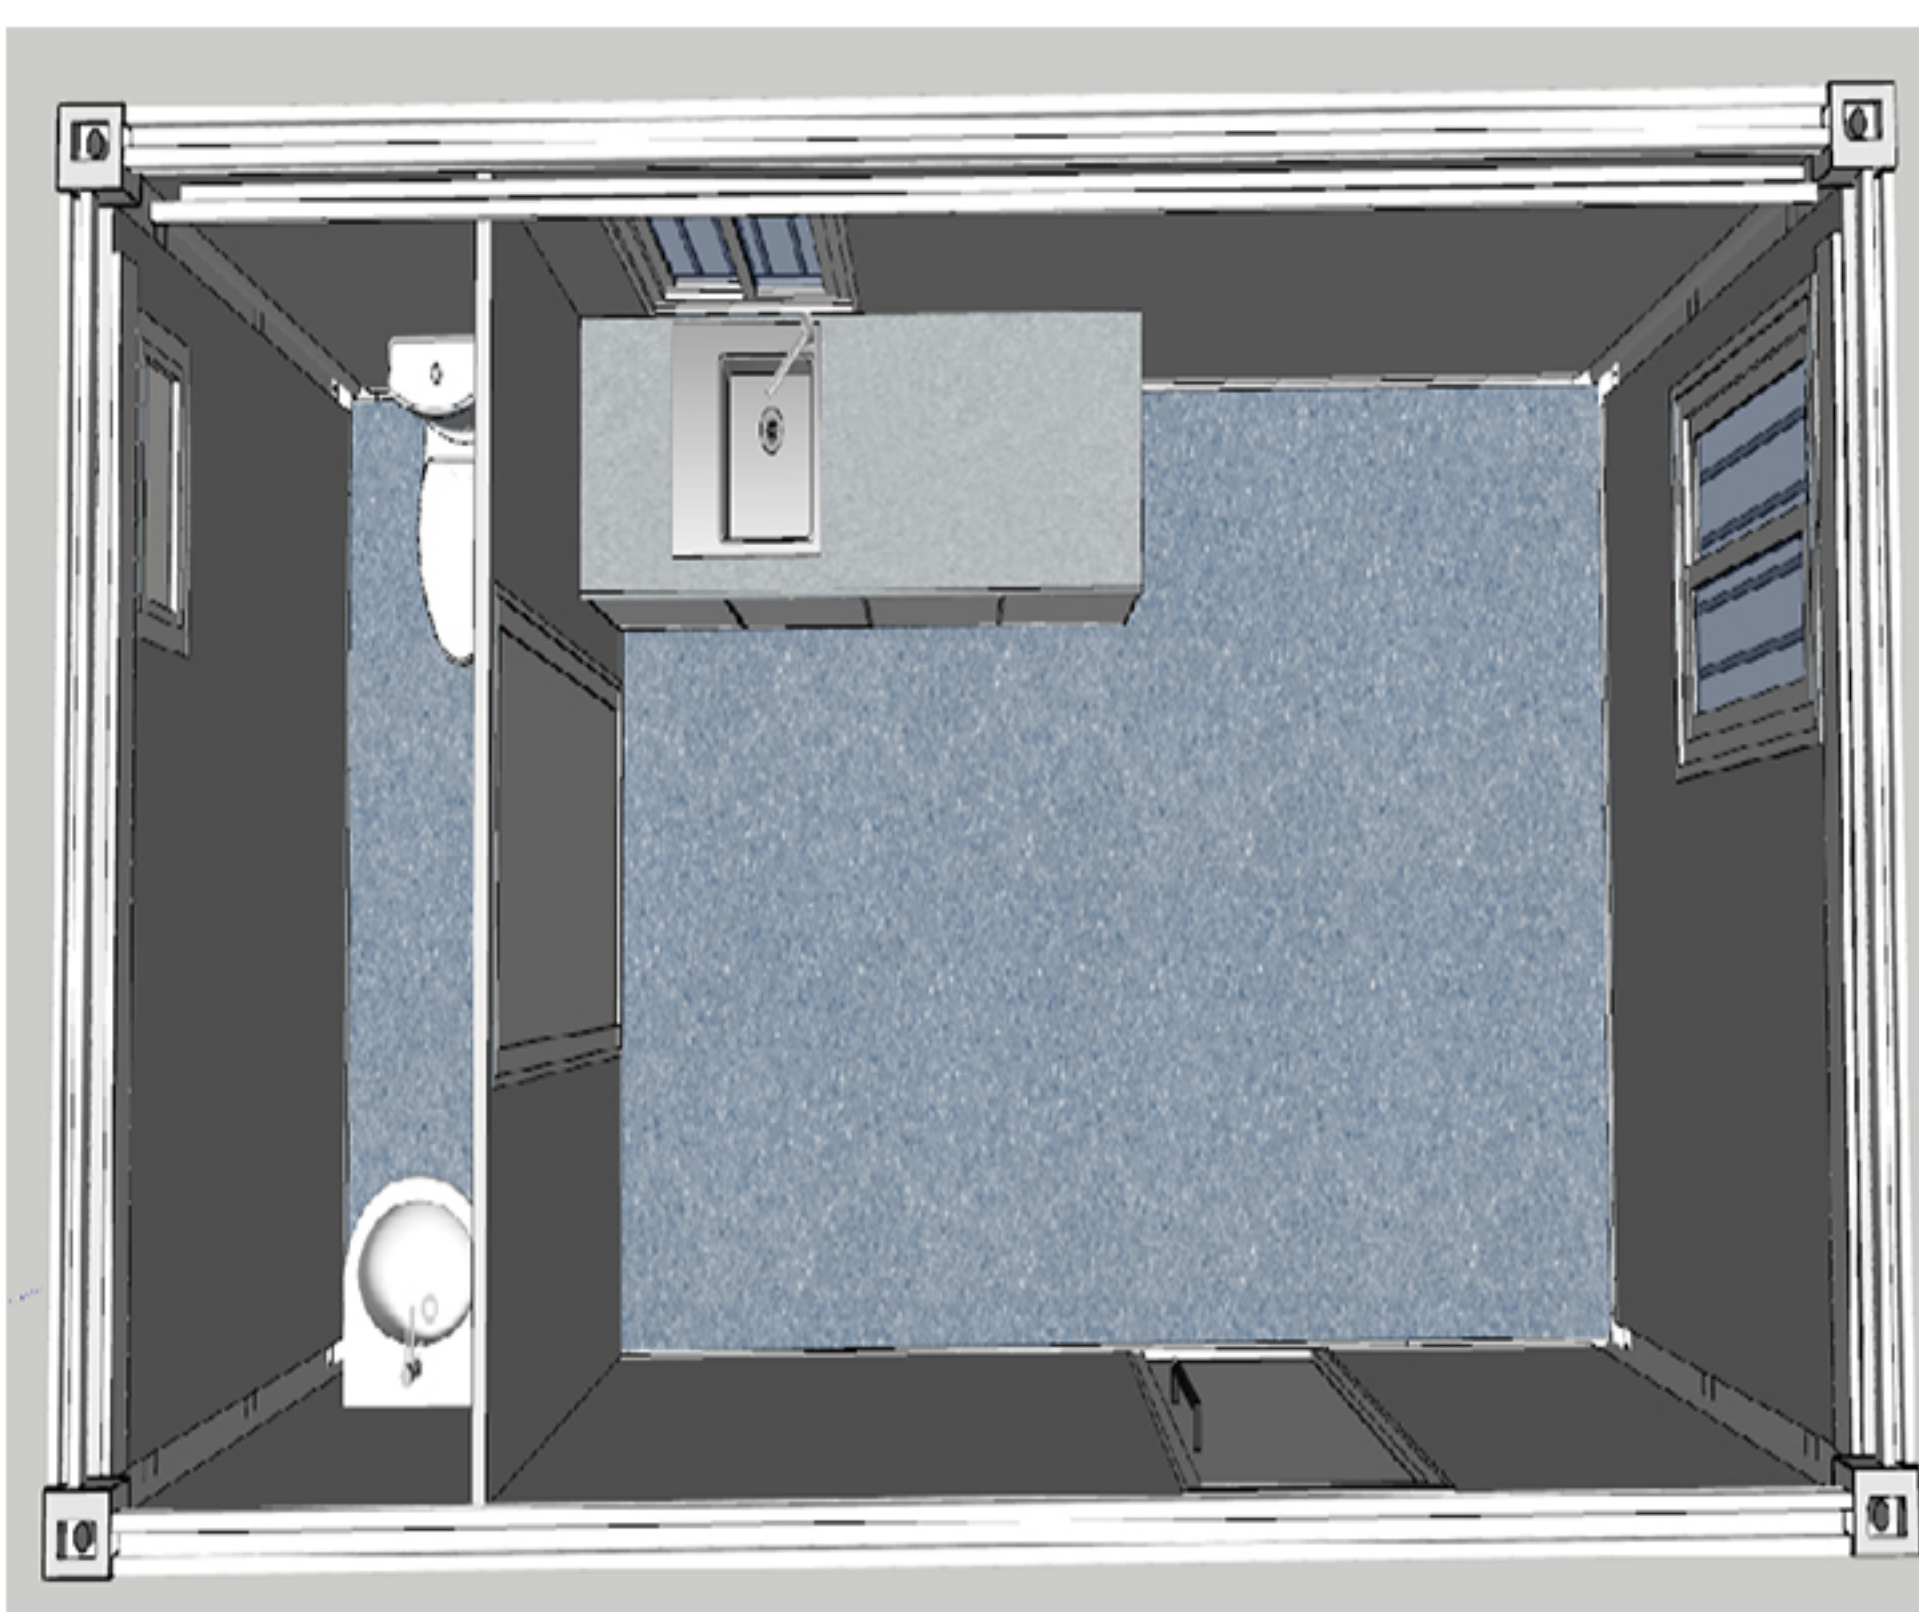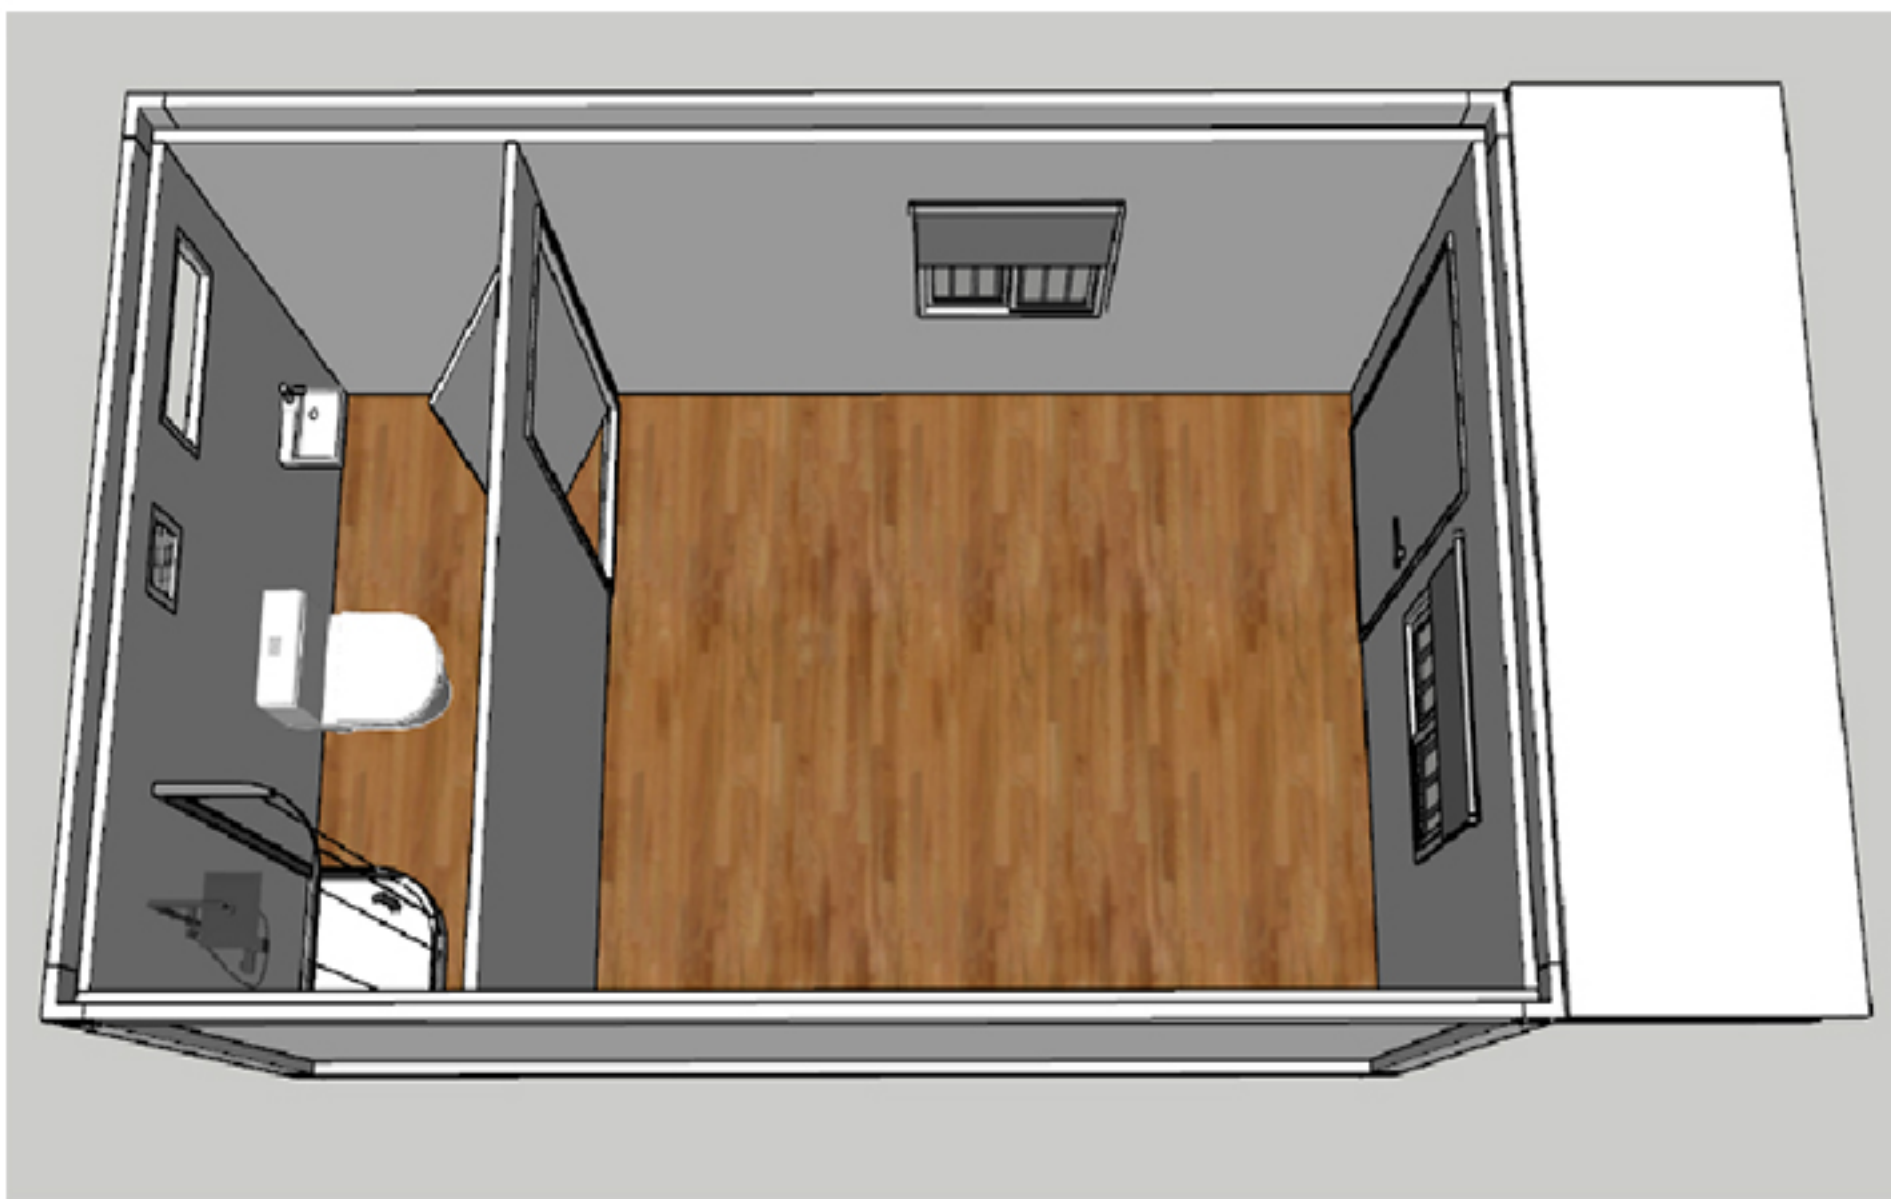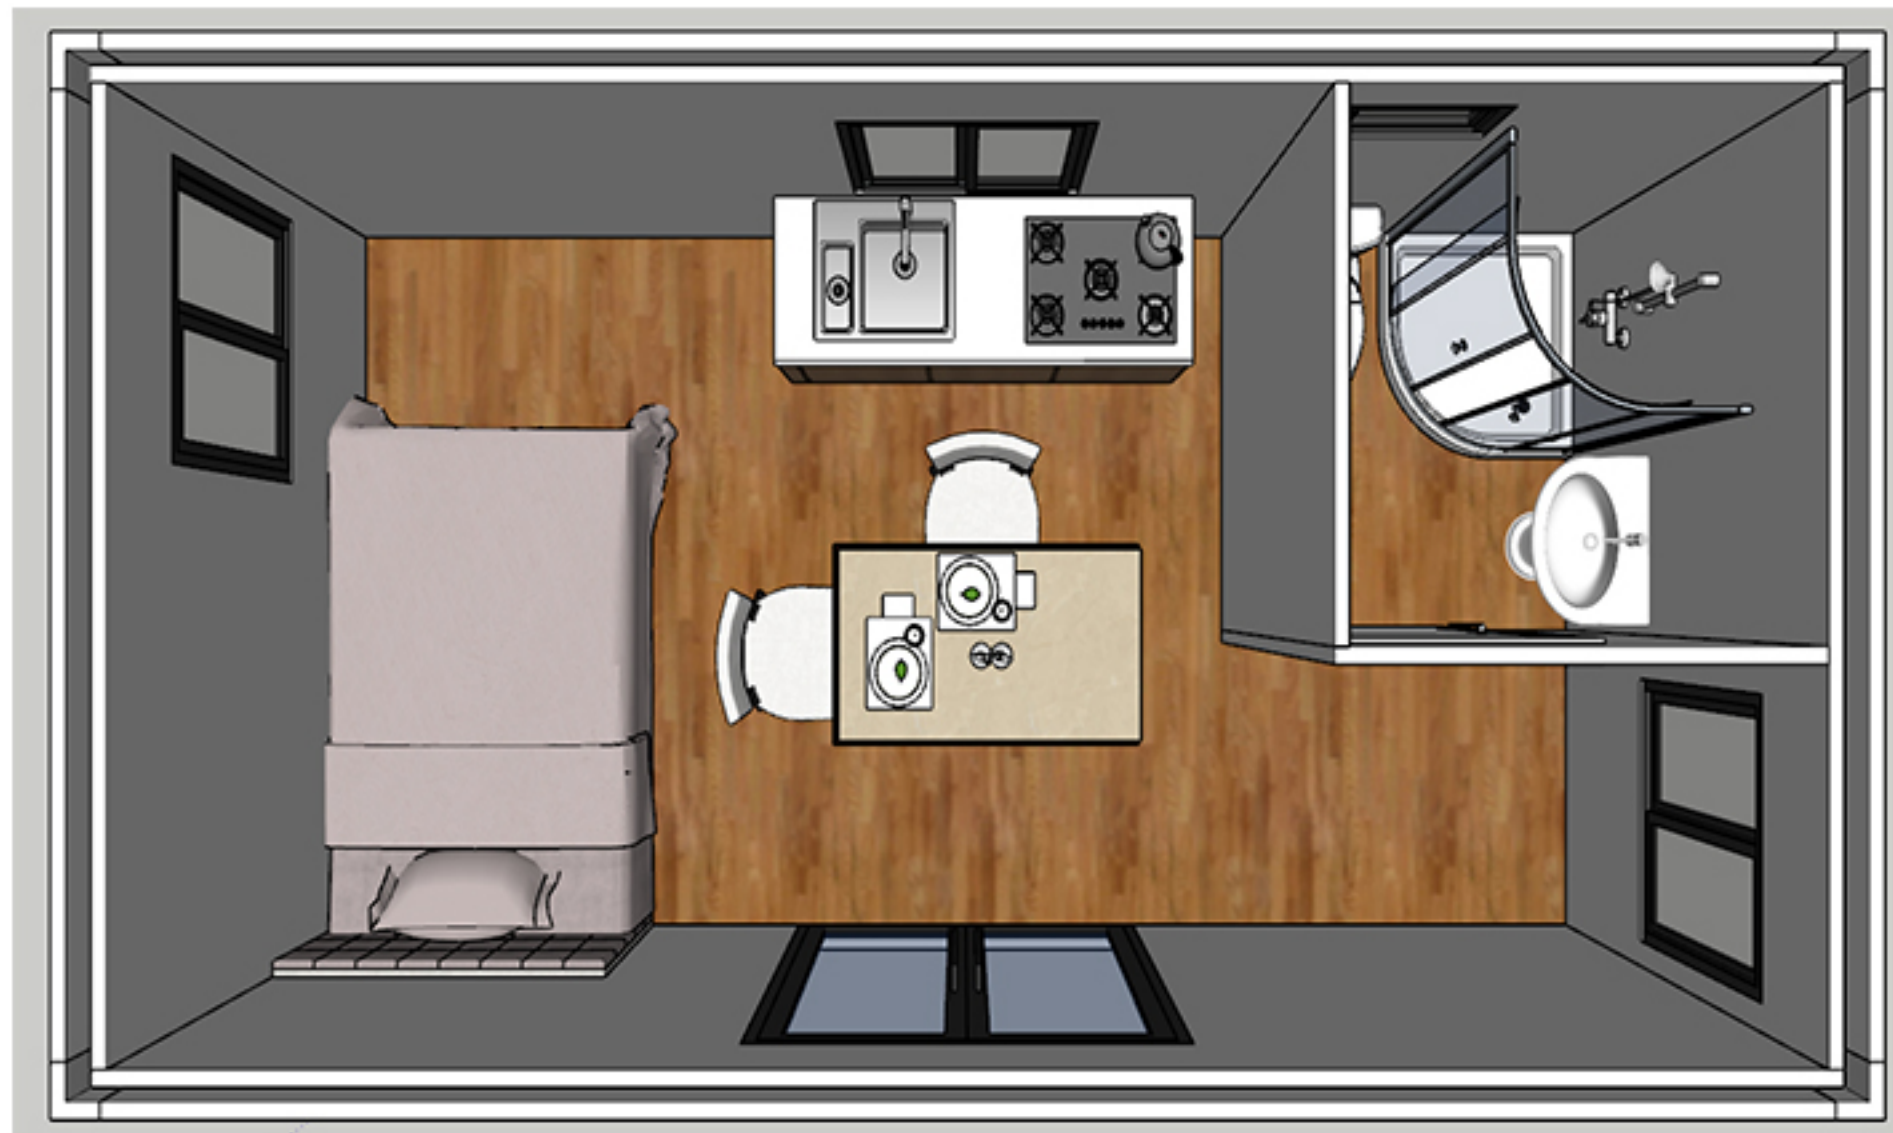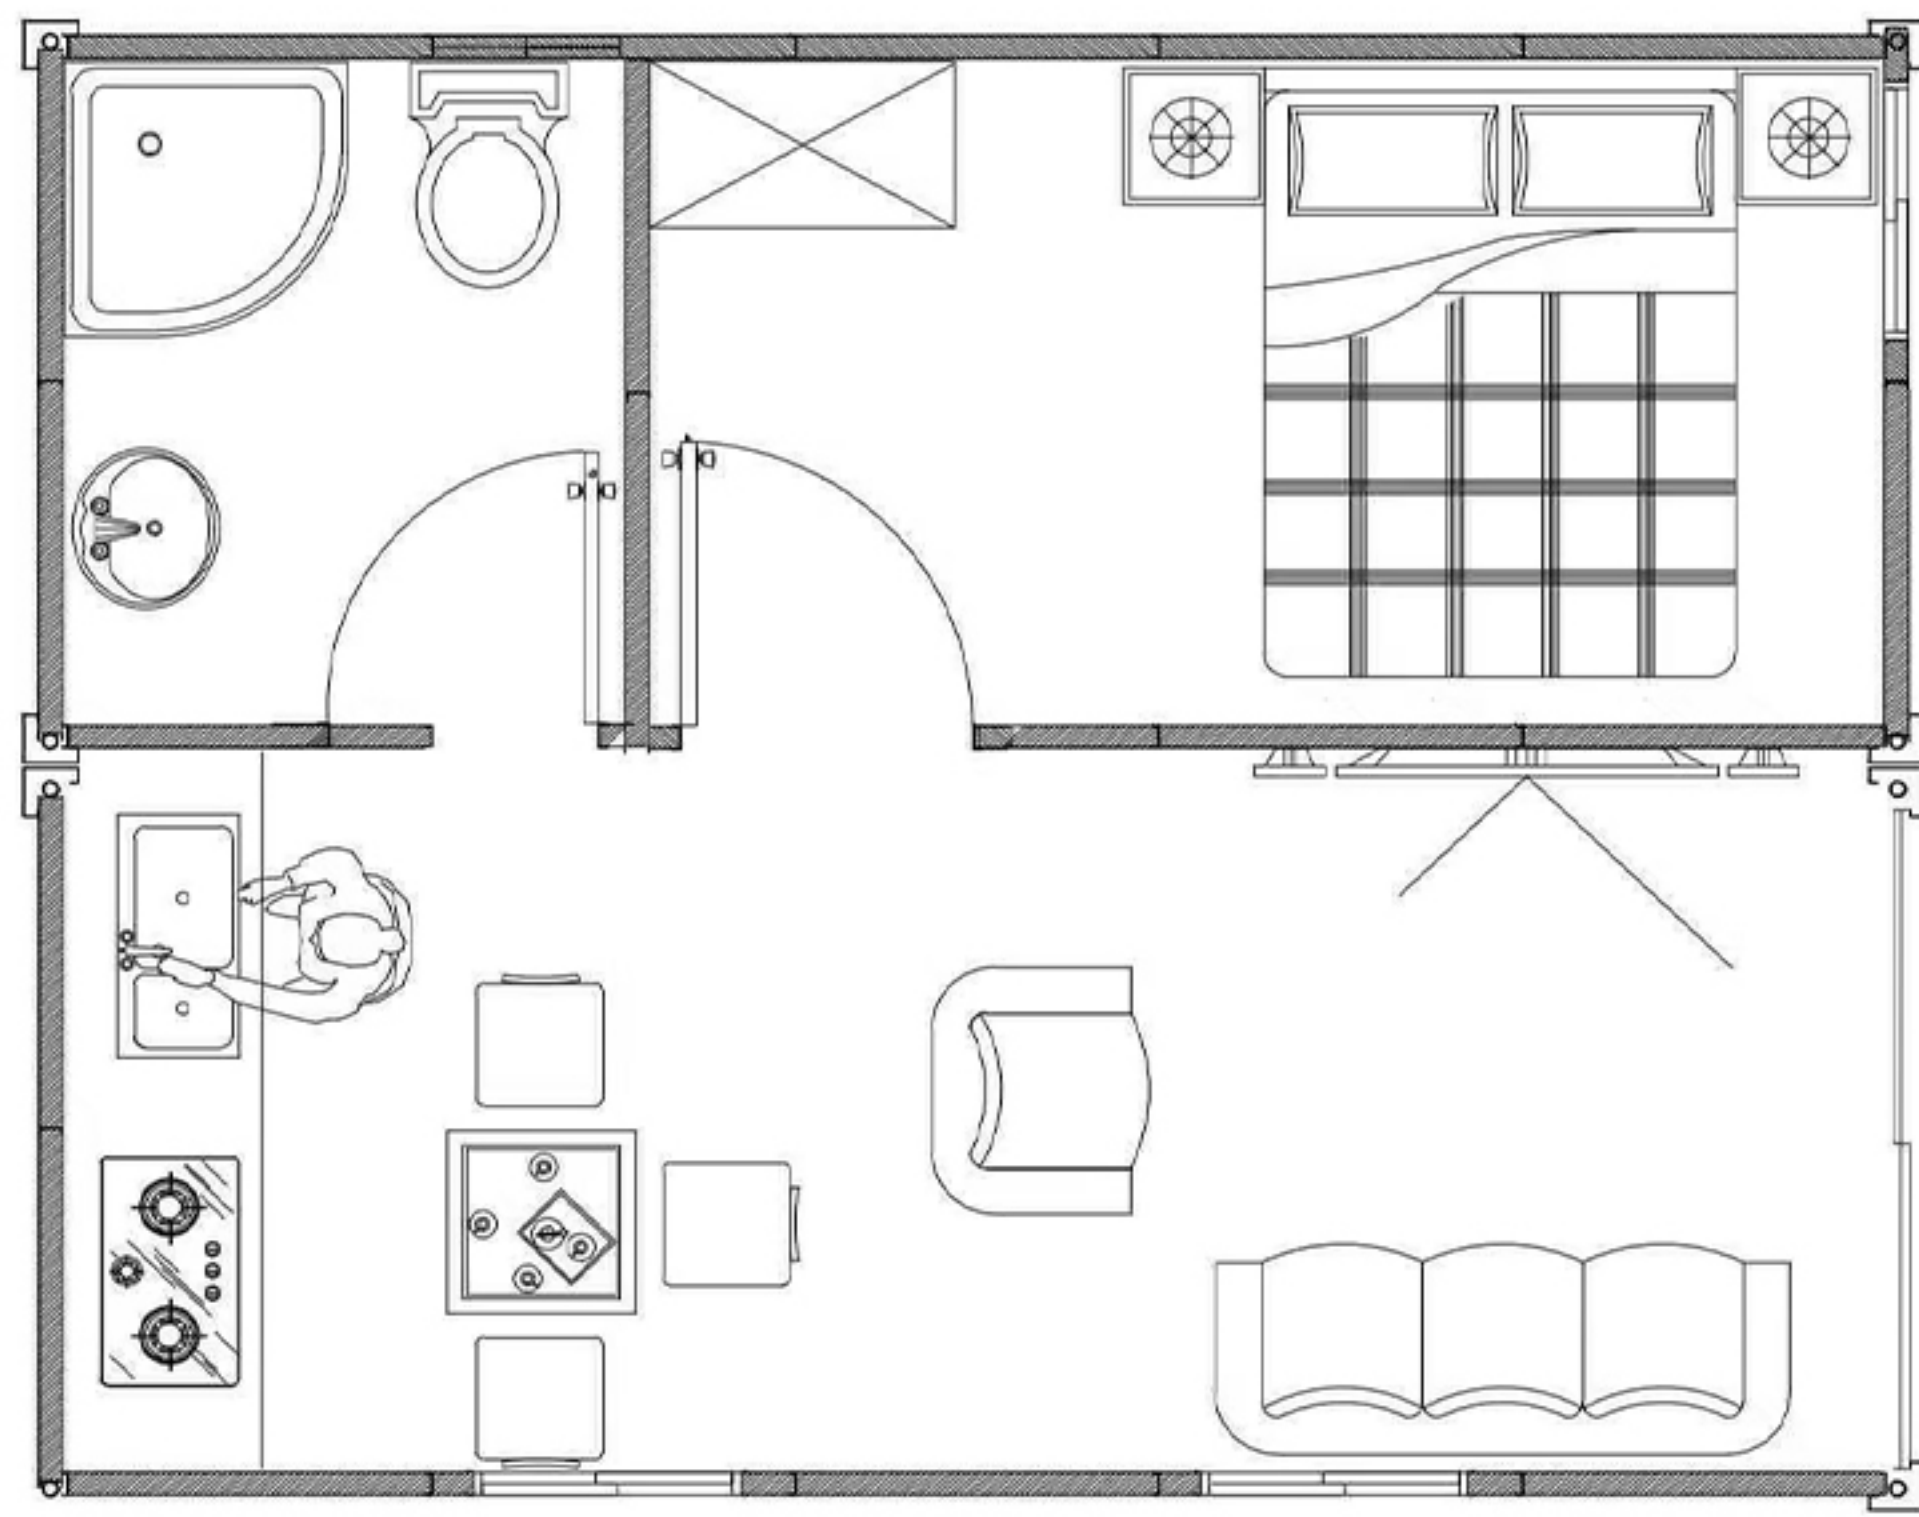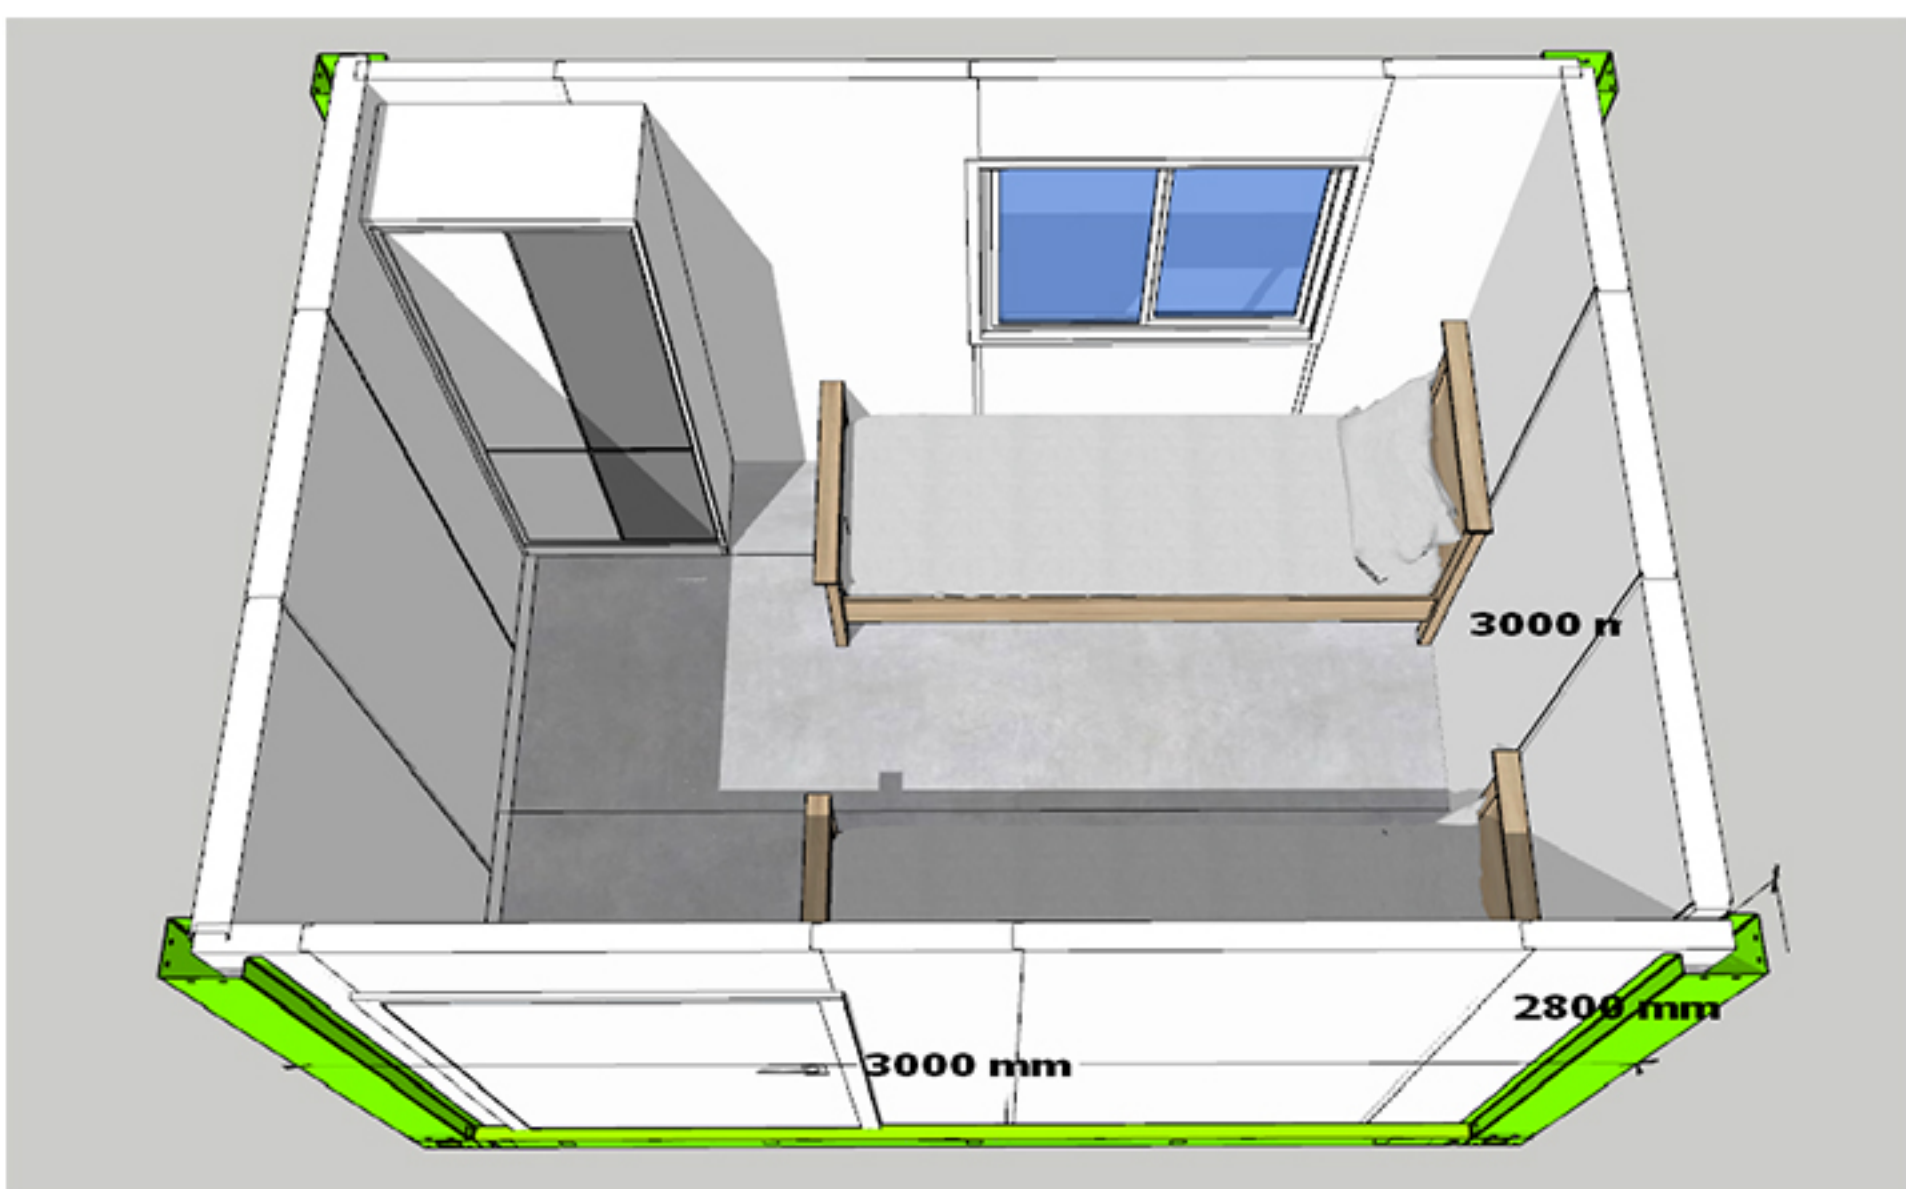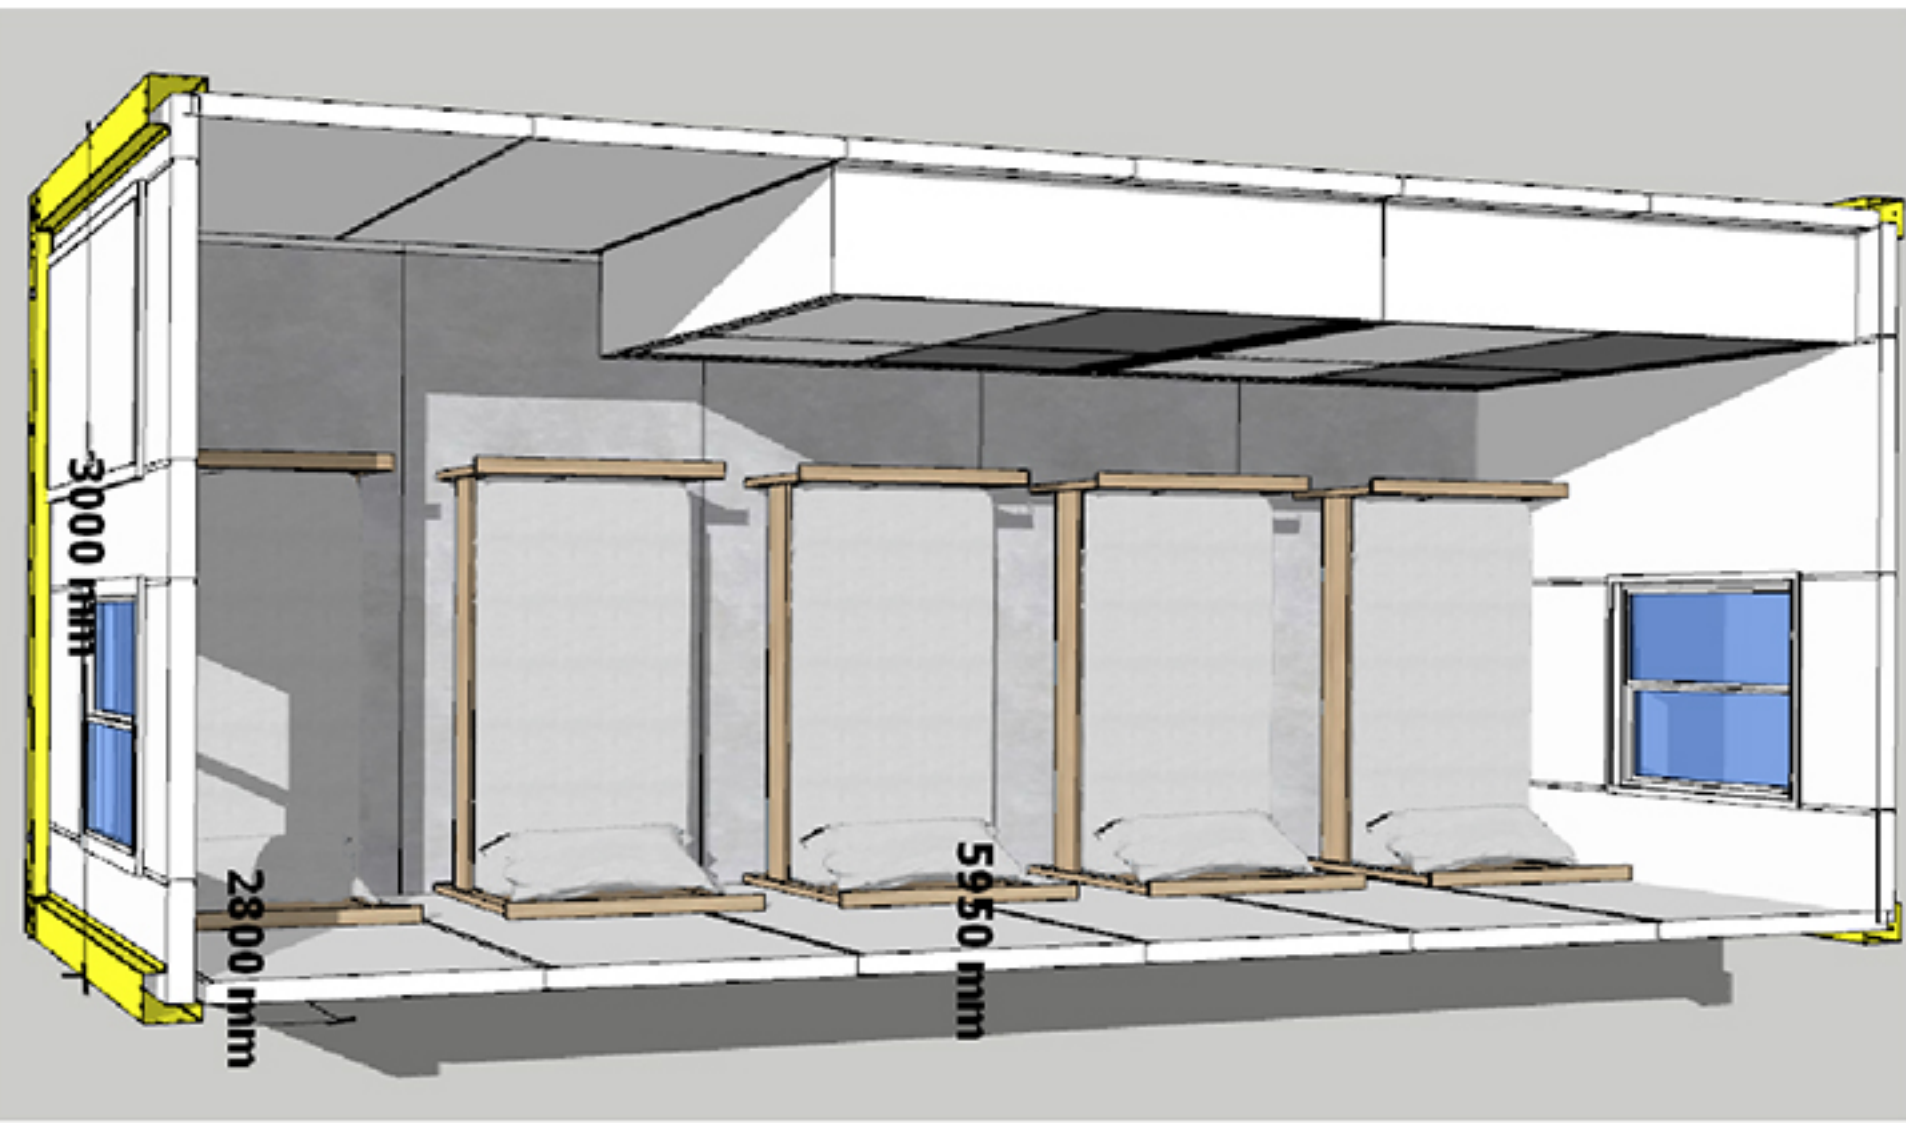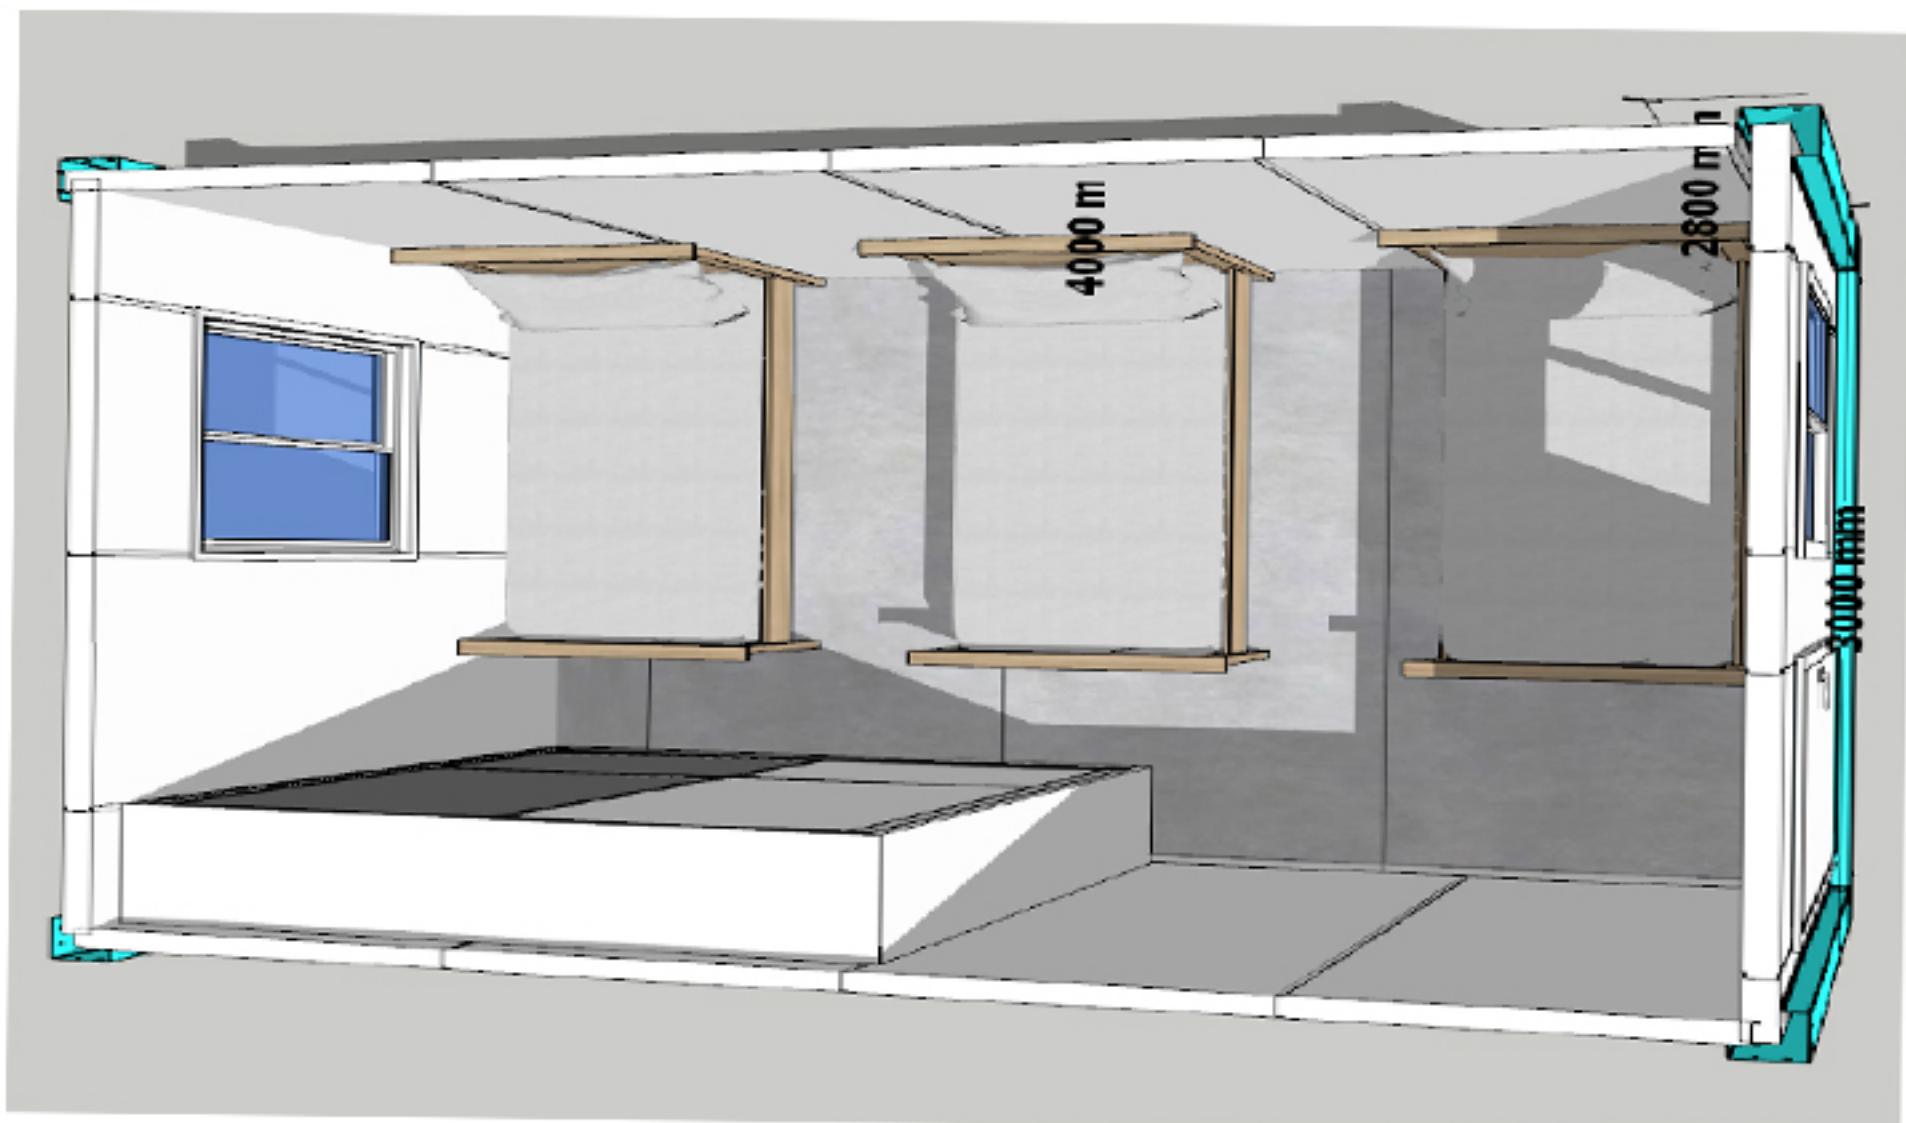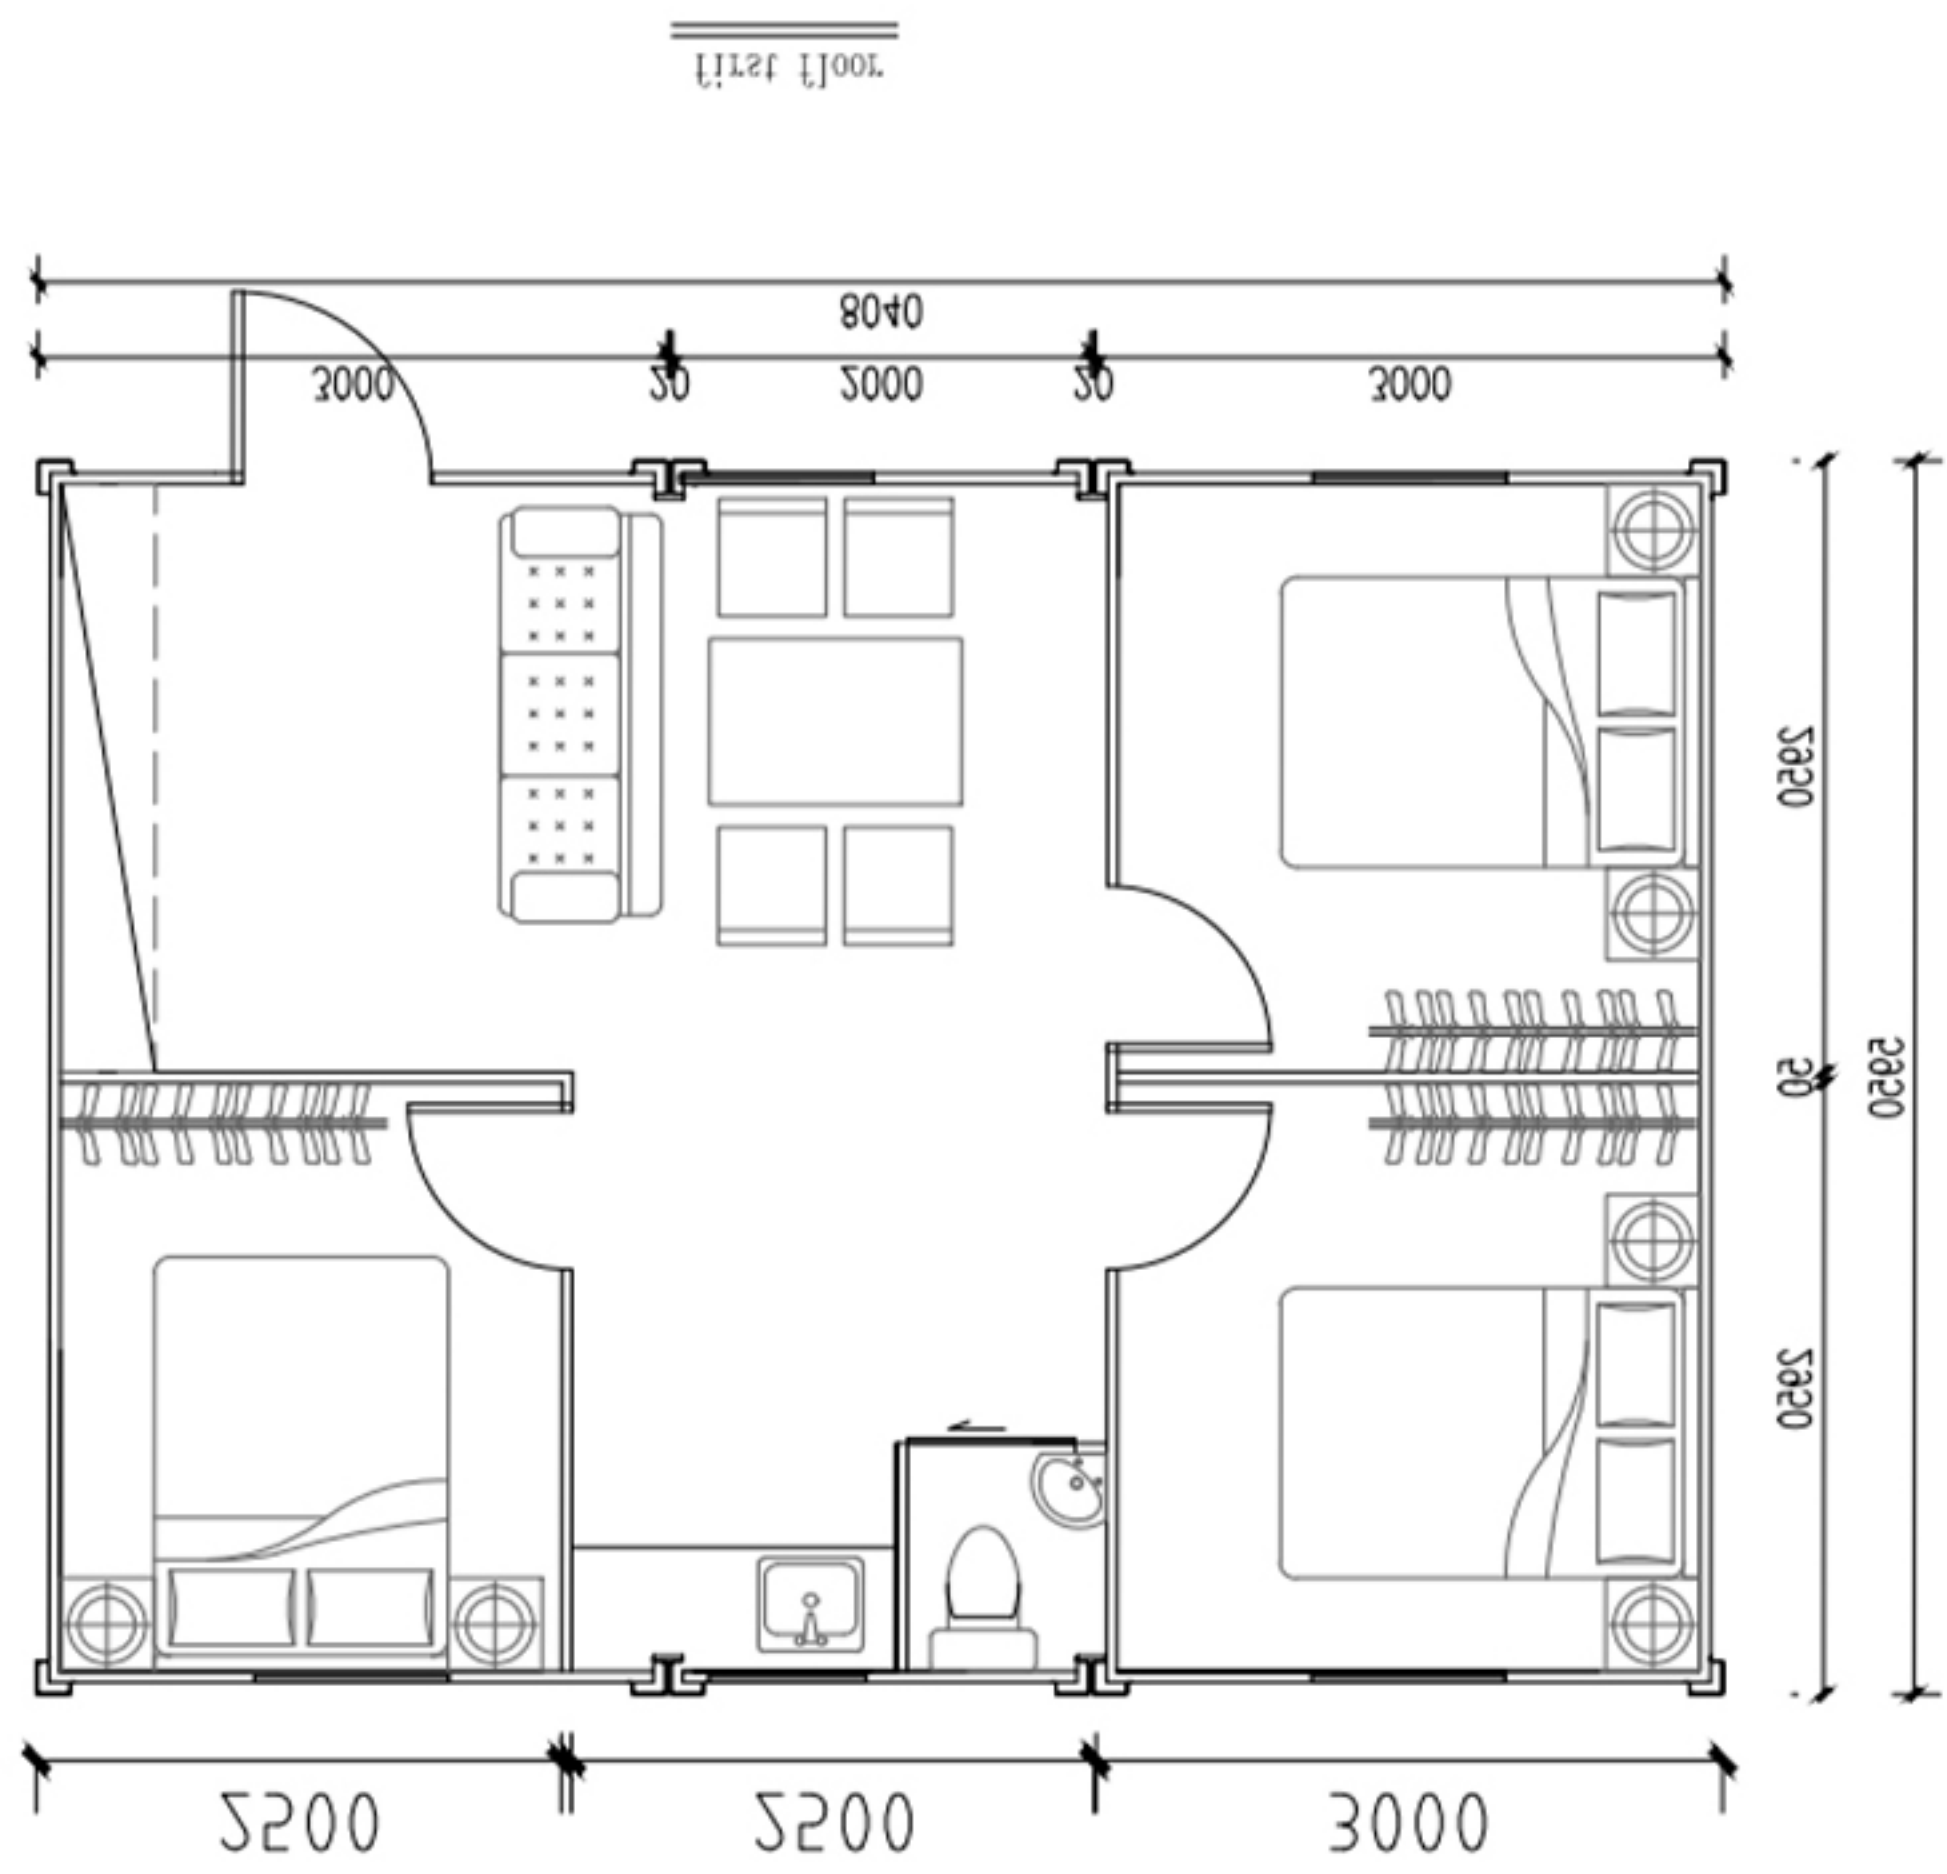

Color Customization



Frame



More



Exterior Wall

Installation Tools



electric drill



17&19 sleeve



hole opener



cutting machine



Line drop



hammer



spirit level



glue gun



wrench



rivet gun


Loading Volume




20GP=7 UNITS

40HQ=17 UNITS

Installation Process

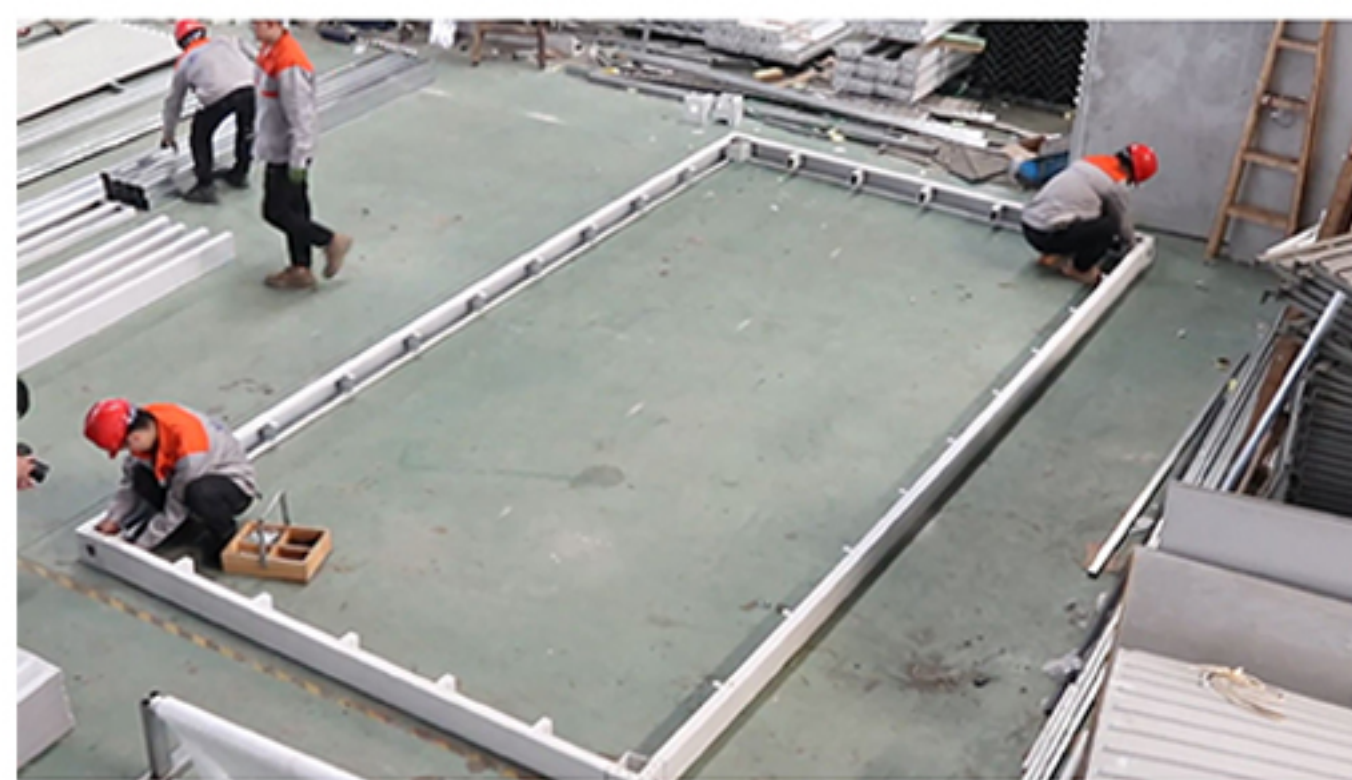

1 Put floor beam and floor fittings in order

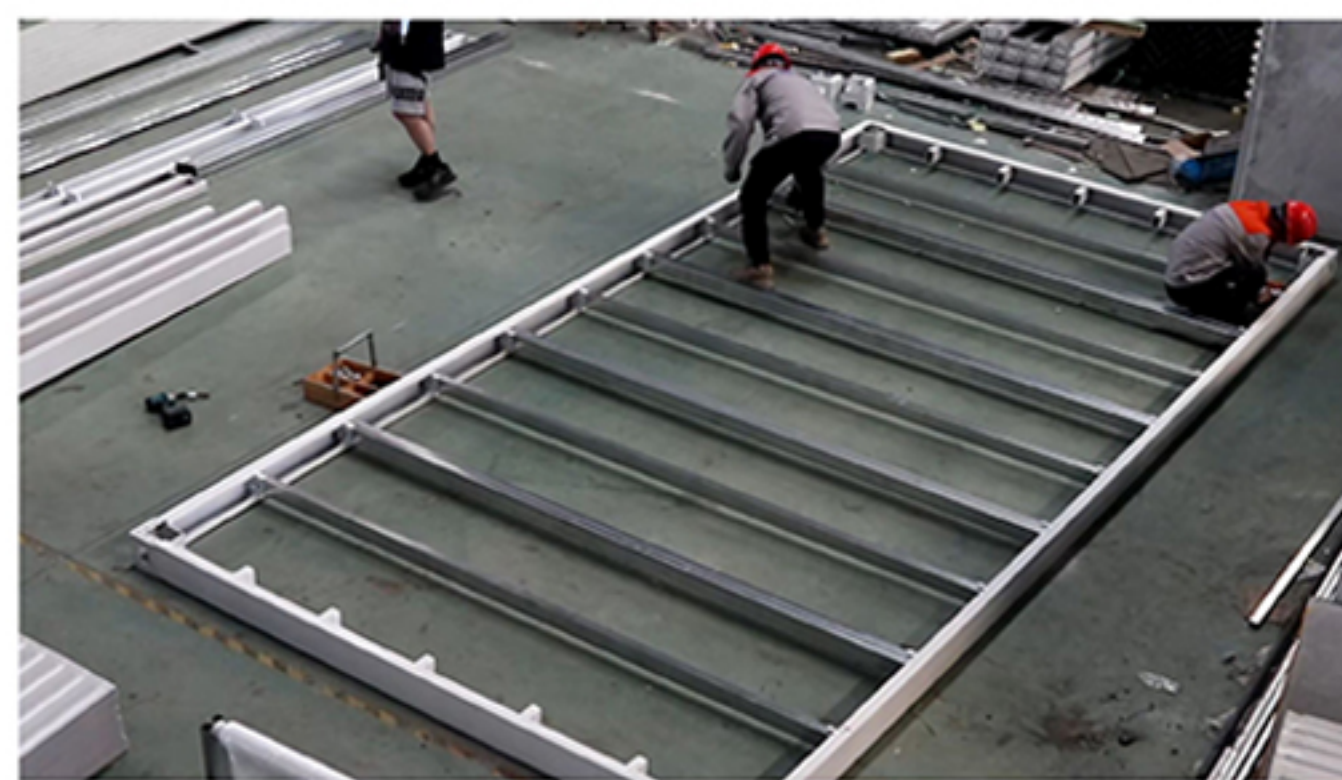


2 Install floor purlins




3 Install columns, make sure it's vertical



4 Put floor board on floor purlins

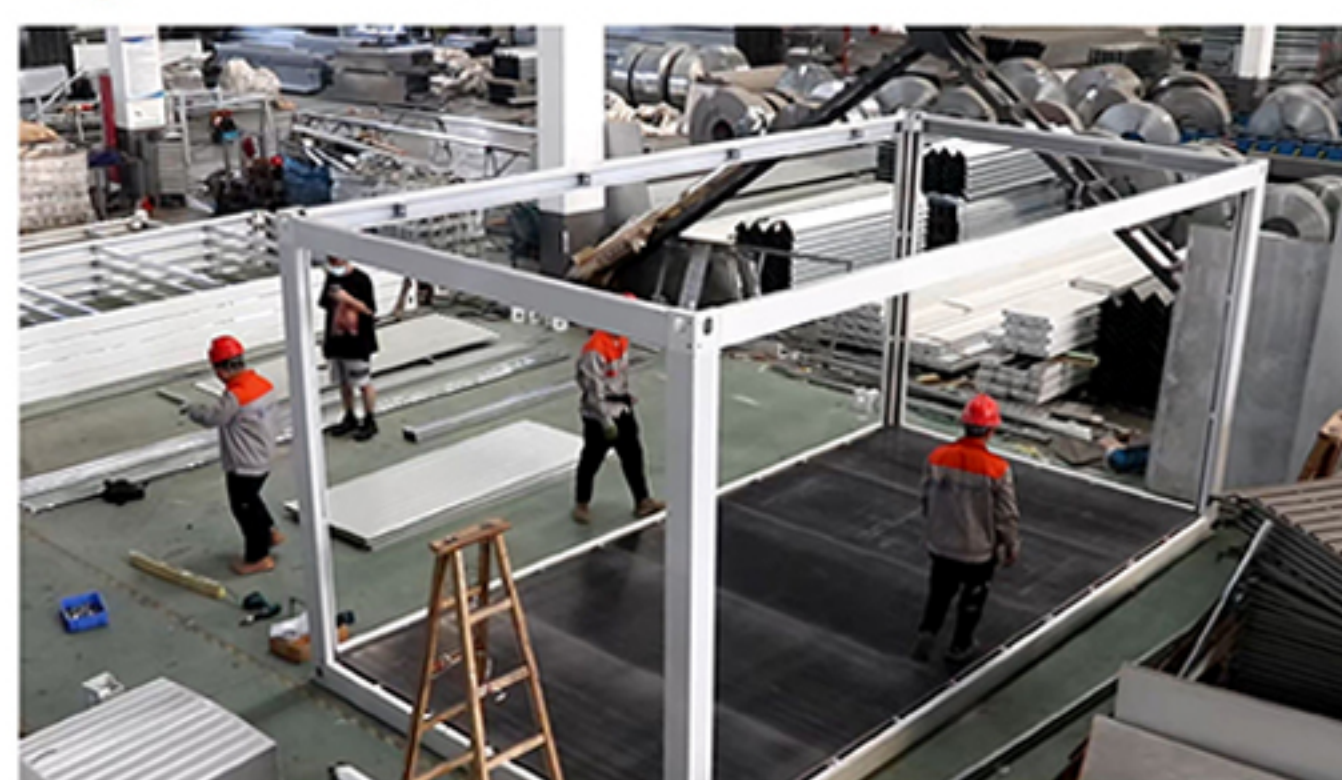

5 Install floor board with flat screws

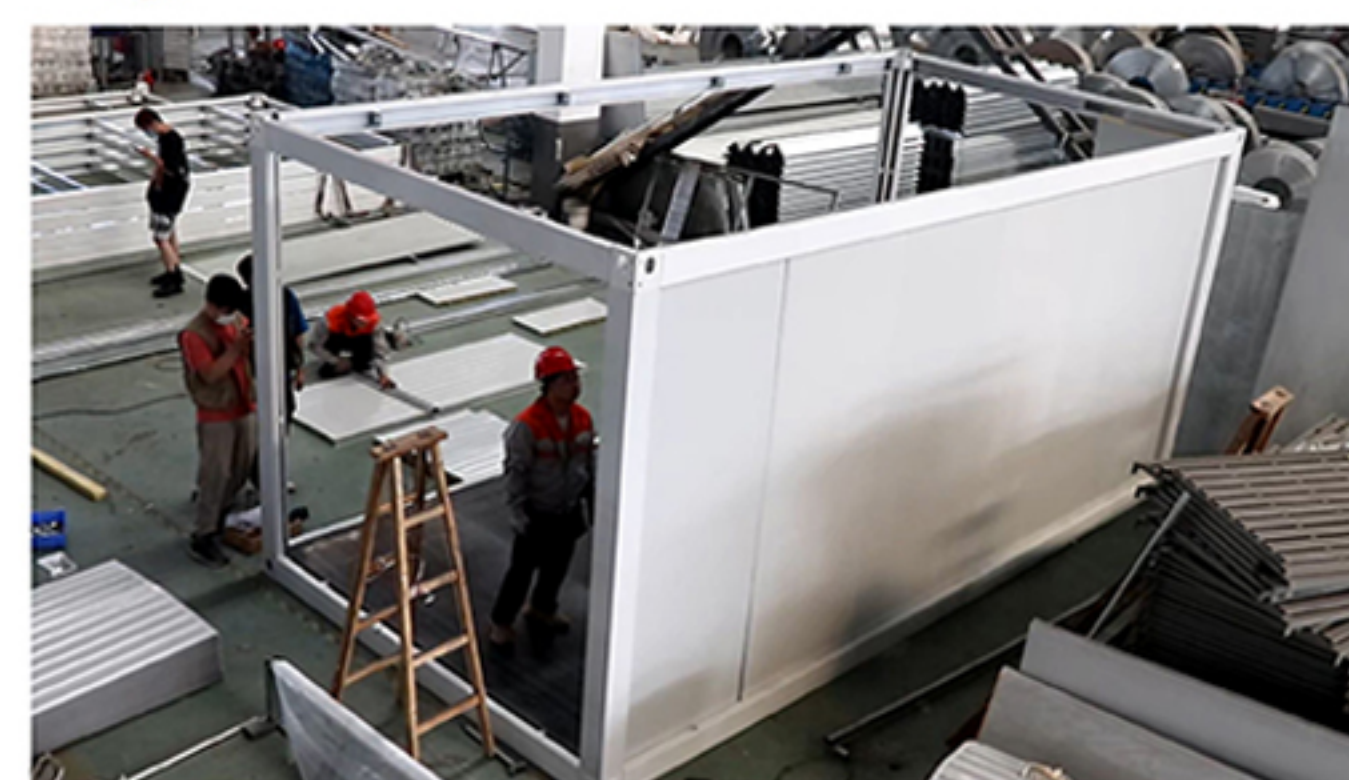

6 Install wall panels



7 Install doors and windows



8 Install ceiling tiles and roof purlins



9 Put insulation layer on the roof purlins



10 Install roof tiles and put sealant on screws




11 Finish installation



12 Interior view

4 people + 3 hours = 1 container

Quality Inspection

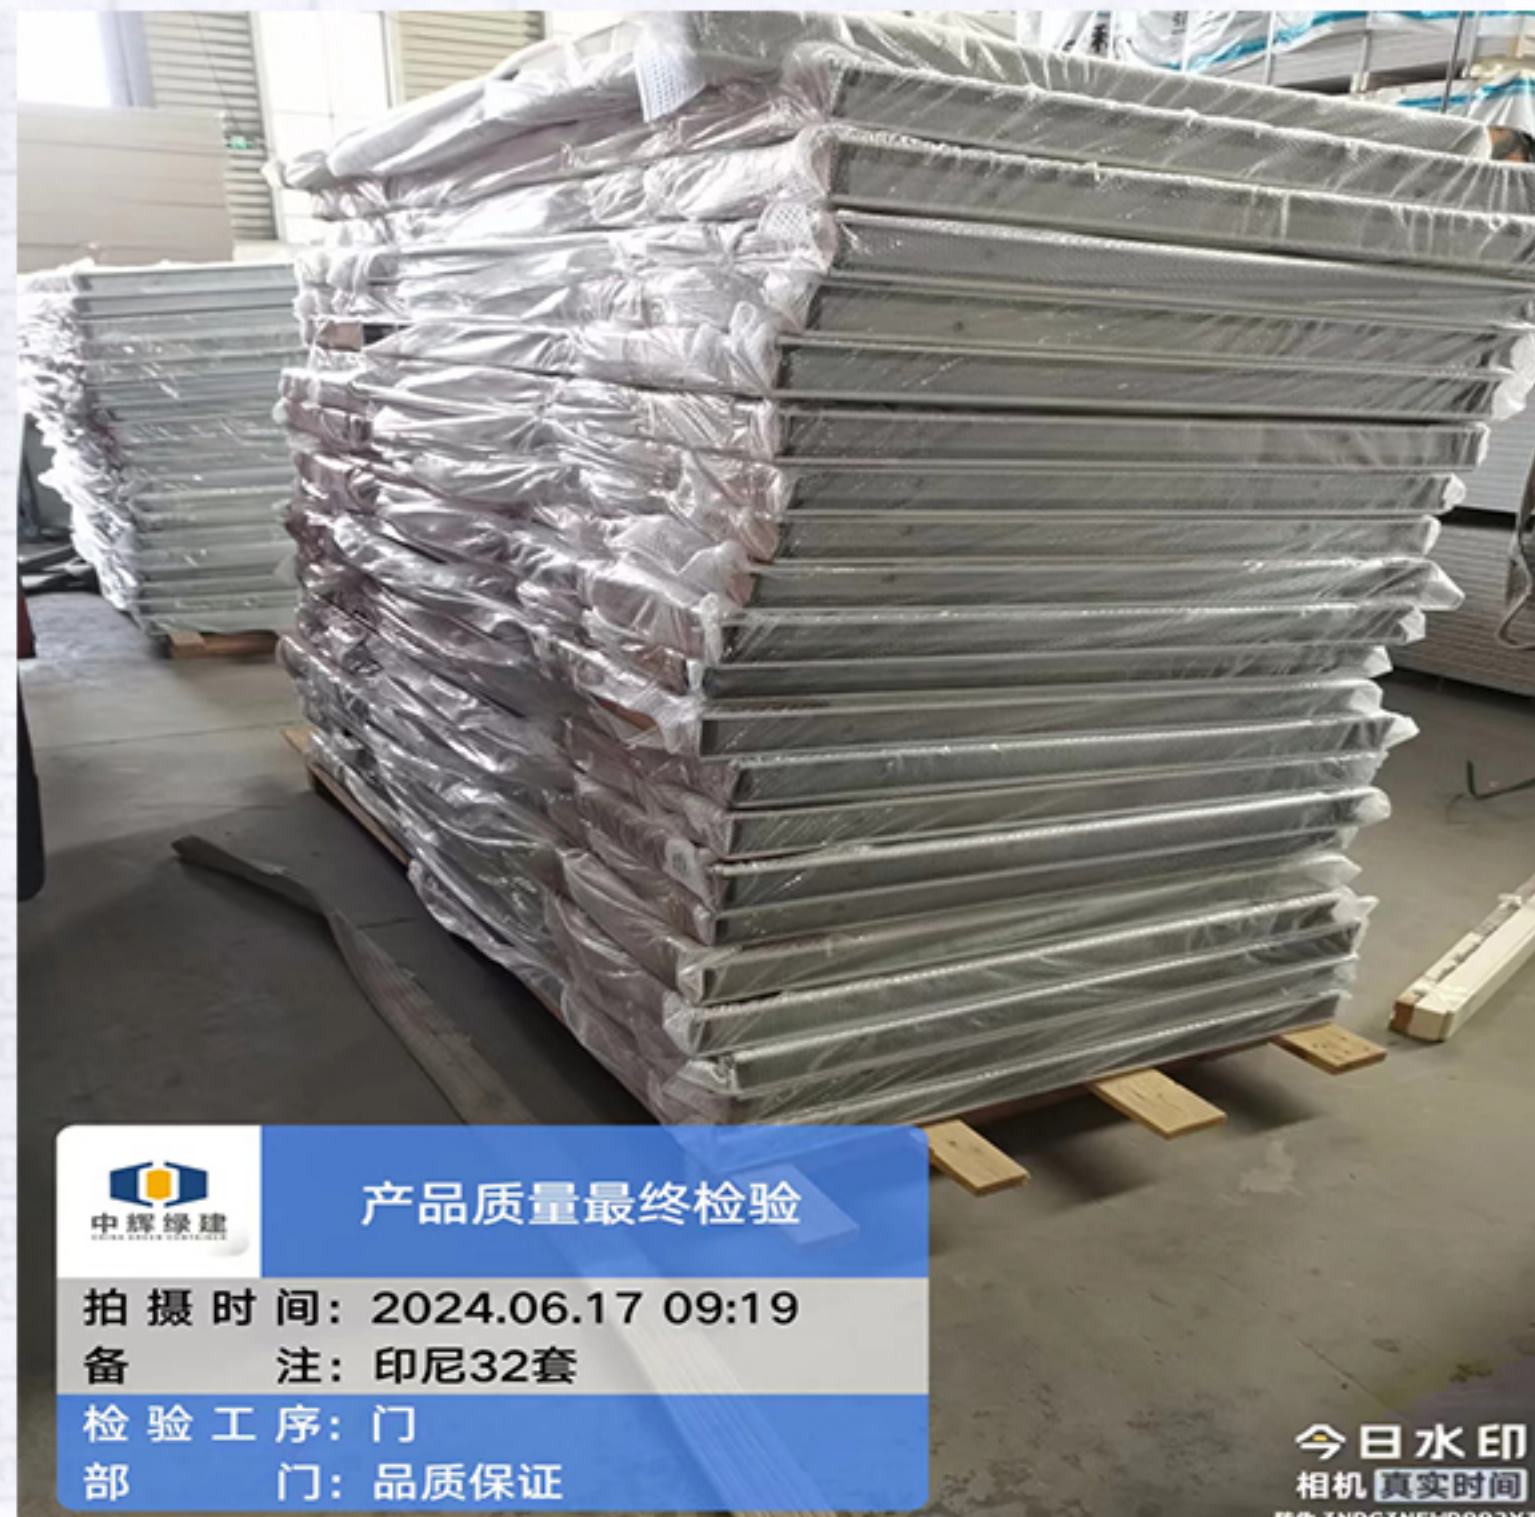

More



About Us

WORKSHOP

Guangdong Zhonghuilvjian Moving House Technology Co., Ltd. have 28 manufacture basic in China, high production capacity, can offer to any quantity inquiry any time.



Q&A

1.How about the delivery time?

Its around 25-40days, in order to give you an accurate shipping time, could you please share your delivery location?

2.What is your payment terms?

The payment terms could be VISA, Mastercard, e-checking, T/T, wire transfer, western union and pay via Alibaba.

3.What is the minimum quantity for mass purchase?

The minimum order quantity (MOQ) for this product is only 1 piece.

4.Whats the shipping cost?

The shipping cost will be determined by the best service provider and the specific amount needs to be confirmed with my manager.

5.Who could provide the Warranty Service?

We provides one-year warranty after-sales service.



WE CREATE THE SPACE. YOU CREATE THE FUTURE.

CGCH (Olympic Games Supplier)



Guangzhou Office: 9F, No. 622, Huangpu Avenue, Tianhe District, Guangzhou

Anhui Factory Address: Huainan City Datong District Jiulonggang Town Dong Shandong Road North

Foshan Factory: Xinyue Road, Shunde District, Foshan City

United Arab Emirates Branch Office : 1010 Regal Tower, Business Bay Dubai-UAE

Qatar Branch Office : No. 43 - Royal Plaza - Al Sadd, Hub Business Center, Office No.43 , 4th floor Building No. 26 Street No. 343 Area No. 38